

REQUEST FOR FEASIBILITY CHECK

	From: Manoj M Harithaas Mob: +91 9535771291	Email: manoj@rfconnector.in
---	--	-----------------------------

Client Code : TB4520

Ref No: _STK-57112857/1049

Dt: 16 OCT 2025

Subject: Request for Feasibility Approval

Customer: BEL - Bengaluru
Project: Super Components
Part No : STK-571128571282
Description: CONN RF50 SMA SCREW

Existing Manufacturers and Their Part Numbers:

STK Part Number	Description	Competitor Part No	Competitor Name
STK-571128571282	CONN RF50 SMA SCREW ON FE CONT HER W/CY	R125.609.000	RADIALL INDIA PRIVATE LIMITED

Please prepare the data sheet, if feasible

For any query or clarification please feel free to contact.


Please prepare the data sheet, if feasible

For any query or clarification please feel free to contact.


SCREW ON FEMALE RECEPTACLE
HERMETIC-WITH CYLINDRICAL CONTACT

R125.609.000


Series : SMA

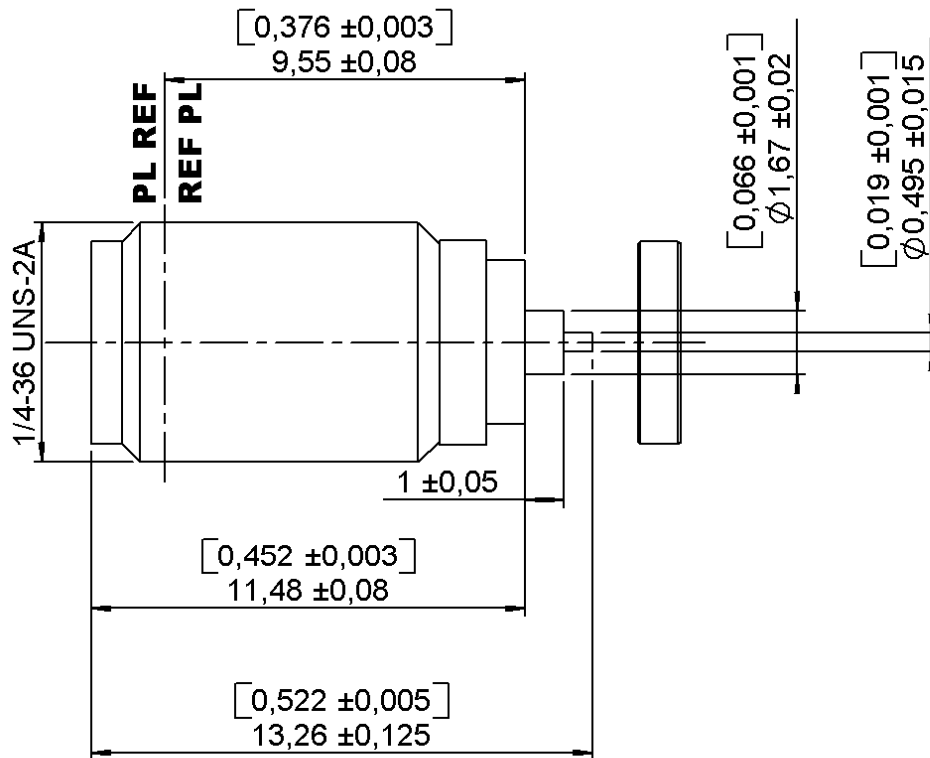

SCALE 1:1



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	ALUMINIUM ALLOY	GOLD 1.3 OVER NICKEL 2
OTHERS PARTS	BERYLLIUM COPPER	-
-	-	-
-	-	-

Issue : 0837 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SCREW ON FEMALE RECEPTACLE
HERMETIC-WITH CYLINDRICAL CONTACT

R125.609.000

Series : SMA

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-26.5	GHz
VSWR	1.10 + 0,0100	x F(GHz) Maxi
Insertion loss	0.12	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	100	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating temperature	-65/+165	$^{\circ}\text{C}$
Hermetic seal	10-5	Atm.cm ³ /s
Panel leakage	IP68	

OTHERS CHARACTERISTICS

Assembly instruction

Others :

Storage temperature : ambient

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	2.8 N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	280 N.cm
Mating life	500 Cycles mini
Weight	1,7400 g

Issue : 0837 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

