


Technical Data	STK SERIES ANTENNA	QUALITY PRODUCT of INDIA
----------------	--------------------	-----------------------------------

Nomenclature: CONN.RF PLUG ST BNC CRIMP	Page No. 1 of 1
---	--------------------

STK-571182281249	CONN.RF PLUG ST BNC CRIMP
------------------	---------------------------

OUTLINE DRAWING

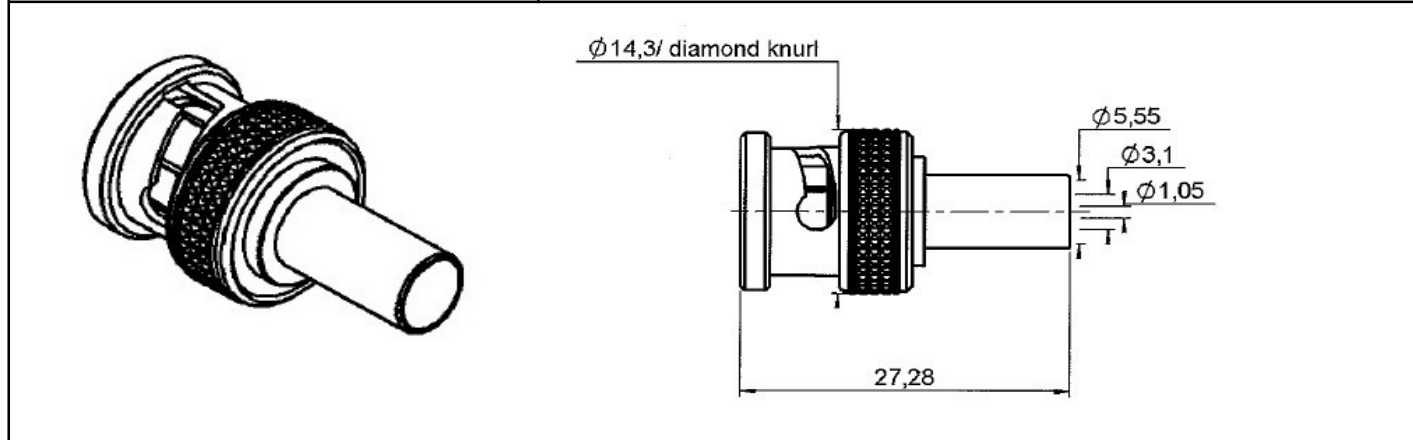

TECHNICAL DATA

ELECTRICAL DATA	
Impedance	50 Ω
Frequency	0-4 GHz
VSWR	$1.3 + 0.0000 \times F(\text{GHz})$ Maxi
Insertion loss	$0.115 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (57 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1500 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – clamp nut	0,0000 mm
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycle mini
Weight	8,7890 g

DIMENSION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2
INSULATOR	PTFE	
GASKET	SILICON RUBBER	
OTHERS PARTS		NICKEL 2

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	31.10.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in