



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50 SMA RP ST F TAB END LAUNCH


Page No.

1 of 1

STK-571188811289

CON RF50 SMA RP ST F TAB END LAUNCH

OUTLINE DRAWING

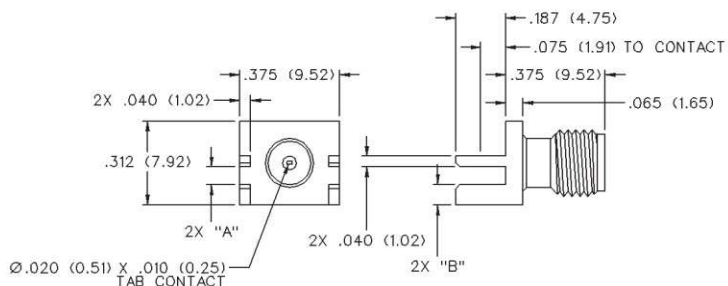

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-26.5 GHz
V.S.W.R	1.05 + .005f
Inserting Loss	0.06 f (GHz), tested at 6 GHz
RF leakage	2.5 GHz
Dielectric	1000 Veff Mini
Insulation	5000 M Ω Mini
Voltage Rating	500 Veff Maxi

ENVIRONMENTAL INFORMATION

Operation temperature	-65°C ~ 165°C
-----------------------	---------------

MECHANICAL INFORMATION

Torque	7 to 10 inch-pounds
Durability	500 cycles minimum

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		GOLD, OVER NICKEL			
CONTACT		BRASS		GOLD, OVER NICKEL			
INSULATOR		PTFE		-			
GASKET		SILICON RUBBER		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in