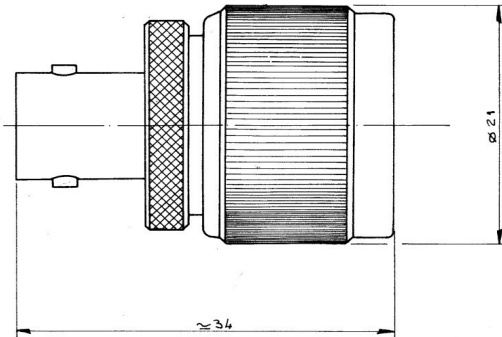


		STK SERIES CONNECTOR		 www.rfconnector.in			
Technical Data							
Nomenclature: N(M) TO BNC(F)							Page No. 1 of 1
STK-571622501296			N(M) TO BNC(F)				
OUTLINE DRAWING							
							
TECHNICAL DATA							
ELECTRICAL DATA							
Impedance	75 Ω						
VSWR	1.15 + 0.0025 F(Ghz)						
Tension tenure	1500 Veff						
Frequency	4 GHz						
ENVIRONMENTAL INFORMATION							
Operation temperature	-65/+125 ° C						
MATERIAL INFORMATION							
COMPONENTS		MATERIALS			PLATINGS (mm)		
Revertement masse		-			Nickel		
Body		-			Nickel		
Inner Contact		-			Gold		
Metallique		Brass			Laiton		
Metalic part		Brass			Beryllium copper		
Insulator		PTFE			-		
Gasket		-			Silicon		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
 Synergy Telecom Pvt Ltd Defence & Aerospace Division							Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd - New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division . This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.							
www.rfconnector.in							