

Technical Data	STK SERIES ANTENNA	QUALITY PRODUCT OF INDIA
Nomenclature: FEMALE TO FEMALE ADAPTOR SPRONG LOADED		Page No. 1 of 1

STK-571623721459	FEMALE TO FEMALE ADAPTOR SPRING LOADED

OUTLINE DRAWING

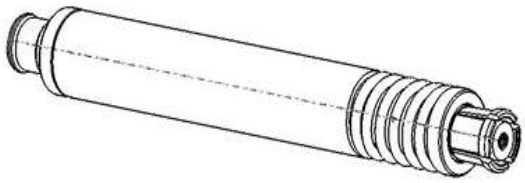

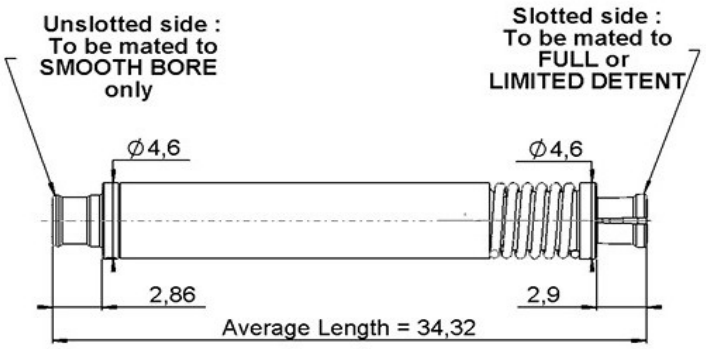

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Frequency	0-18 GHz
VSWR	1.35* + 0,0000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION

Axial force – Mating end	6.8 N mini
Axial force – Opposite end	6.8 N mini
Torque	NA N.cm mini
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	1000 Cycles mini
Weight	2,5700 g

DIMENSION

COMPONENTS	MATERIALS	FINISH
BODY	BRONZE	NPGR
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
OUTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
INSULATOR	PEI	
GASKET		
SPRING		PASSIVATED

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	27.10.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,

WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in