


|                |                    |                                                                                     |
|----------------|--------------------|-------------------------------------------------------------------------------------|
| Technical Data | STK SERIES ADAPTER |  |
|----------------|--------------------|-------------------------------------------------------------------------------------|

|                                               |                    |
|-----------------------------------------------|--------------------|
| Nomenclature: CONN RF 50 SMP FLTNG AD FEM-FEM | Page No.<br>1 of 1 |
|-----------------------------------------------|--------------------|

|                  |                                 |
|------------------|---------------------------------|
| STK-571623721653 | CONN RF 50 SMP FLTNG AD FEM-FEM |
|------------------|---------------------------------|

### OUTLINE DRAWING

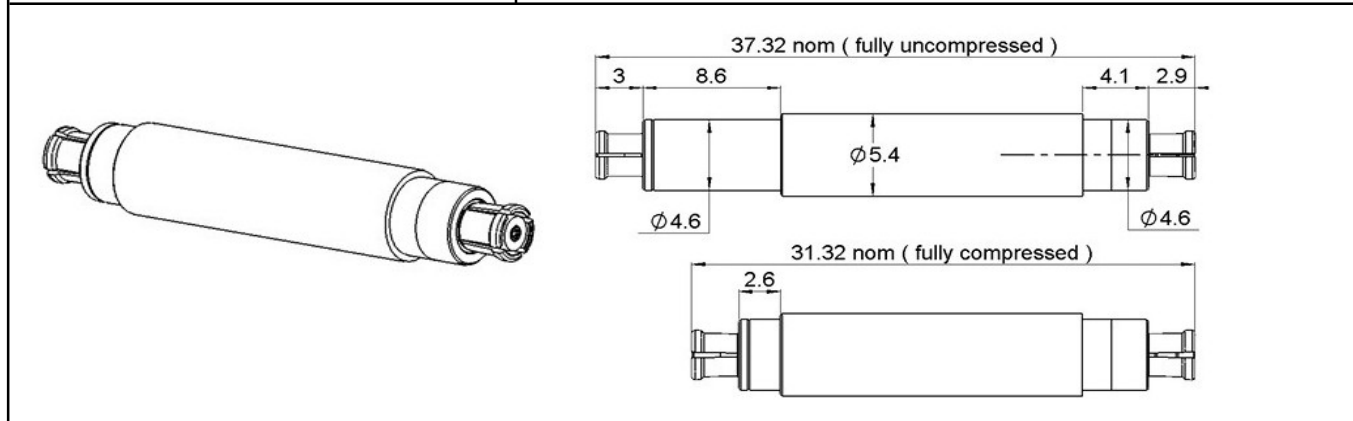

### TECHNICAL DATA

#### ELECTRICAL DATA

|                                 |                               |  |
|---------------------------------|-------------------------------|--|
| Impedance                       | 50 $\Omega$                   |  |
| Frequency                       | 0-18 GHz                      |  |
| VSWR                            | * + 0,0000 x F(GHz) Maxi      |  |
| Insertion loss                  | 0.12 $\sqrt{F}$ (GHz) dB Maxi |  |
| RF leakage                      | - ( ** - F(GHz)) dB Maxi      |  |
| Voltage rating                  | 335 Veff Maxi                 |  |
| Dielectric withstanding voltage | 500 Veff mini                 |  |
| Insulation resistance           | 5000 M $\Omega$ mini          |  |

#### MECHANICAL INFORMATION

|                            |                 |                       |              |
|----------------------------|-----------------|-----------------------|--------------|
| Axial force – Mating end   | 6.8 N mini      | Operating temperature | -65/+85 ° C  |
| Axial force – Opposite end | 6.8 N mini      | Hermetic seal         | NA Atm.cm3/s |
| Torque                     | NA N.cm mini    | Panel leakage         | NA           |
| Mating                     | NA N.cm         |                       |              |
| Panel nut                  | NA N.cm         |                       |              |
| Mating life                | 100 Cycles mini |                       |              |
| Weight                     | 3,1000 g        |                       |              |

#### DIMENSION

| COMPONENTS     | MATERIALS        | PLATINGS (mm)              |
|----------------|------------------|----------------------------|
| BODY           | BRONZE           | NPGR                       |
| CENTER CONTACT | BERYLLIUM COPPER | GOLD 1.27 OVER NICKEL 1.27 |
| INSULATOR      | PTFE + PEI       |                            |
| GASKET         |                  |                            |
| OTHERS PARTS   | STAINLESS STEEL  |                            |
| OUTER CONTACT  | BERYLLIUM COPPER | GOLD 1.3 OVER NICKEL 2     |

| Originated                                                                                   | Date     | Approved      | Date | Rev | Amend | Name | Date | <br>Synergy Telecom Pvt Ltd<br>Defence & Aerospace Division |
|----------------------------------------------------------------------------------------------|----------|---------------|------|-----|-------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Sang                                                                                         | 30.10.25 | Krishnamurthy | -    | 0   | -     | -    | -    |                                                                                                                                                  |
| Synergy Telecom P Ltd,<br><br>WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India |          |               |      | -   | -     | -    | -    |                                                                                                                                                  |
|                                                                                              |          |               |      | -   | -     | -    | -    | Email: sales.blr@rfconnector.in                                                                                                                  |

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

[www.rfconnector.in](http://www.rfconnector.in)