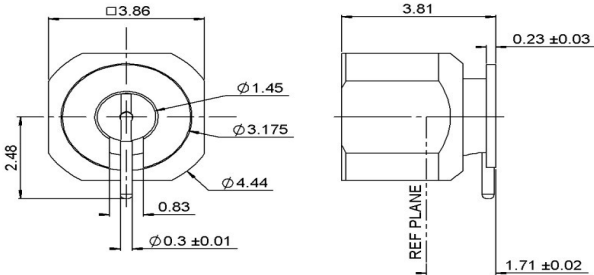


 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in					
Nomenclature:SMT PLUG RECEPTACLE SMOOTH BORE				Page No. 1 of 1				
STK-571654121259		SMT PLUG RECEPTACLE SMOOTH BORE						
OUTLINE DRAWING								
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50 Ω							
Frequency	0-65 GHz							
VSWR	00 + 0,0000 x F(GHz) Maxi							
Insertion loss	0.12* √F(GHz) dB Maxi							
RF leakage	- (NA - F(GHz)) dB Maxi							
Voltage rating	335 Veff Maxi							
Dielectric withstanding voltage	500 Veff mini							
Insulation resistance	5000 MΩ mini							
ENVIRONMENTAL INFORMATION								
Operation temperature	-65/+165 ° C							
MECHANICAL INFORMATION								
Mating End	67 N mini							
Opposite end	67 N mini							
Mating life	500 Cycles mini							
Weight	0,2740 g							
MATERIAL INFORMATION								
COMPONENTS		MATERIALS		PLATINGS (mm)				
Body		BERYLLIUM COPPER		GOLD OVER NICKEL				
Center contact		BERYLLIUM COPPER		GOLD OVER NICKEL				
Insulator		PEEK		-				
Gasket		-		-				
Others parts		-		-				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom PVT LTD Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								