



www.rfconnector.in




Page No.

1 of 1

FEMALE-FEMALE ADAPTER

OUTLINE DRAWING

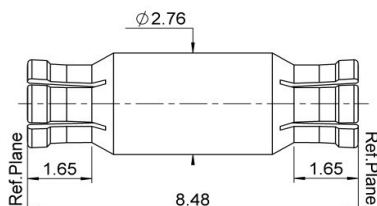

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-65 GHz
Center contact resistance	6 m Ω Maxi
Insertion loss	0.05 $\sqrt{F(\text{GHz})}$ dB Maxi
Outer contact resistance	2 m Ω Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	7 N mini
Opposite end	7 N mini
Smooth bore	11 N Max
full deten	20 N typical
Disengagement force	5 N mini
Disengagement full detent	29 N typical
Mating life - smooth bore	500 Cycles mini
full detent	100 Cycles mini
Weight	0.2000 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
Body		BERYLLIUM COPPER			NPGR		
Center contact		BERYLLIUM COPPER			NPGR		
Insulator		PEEK			-		
Gasket		-			-		
Others parts		-			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.