


Technical Data	STK SERIES CABLE ASSEMBLY	
-----------------------	----------------------------------	---

Nomenclature: Multiport-RF-Cable-RFC 7/2	Page No.
	1 of 1

STK-60222899XXXX	Multiport-RF-Cable-RFC 7/2
	OUTLINE DRAWING

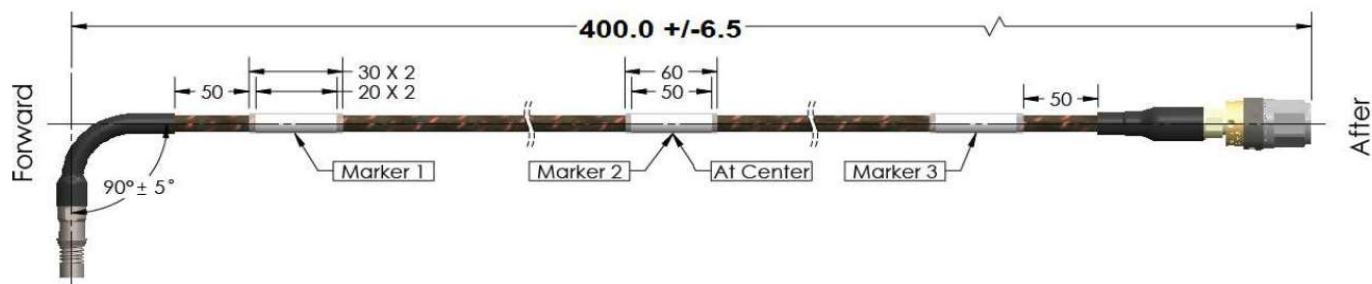

TECHNICAL DATA

ELECTRICAL DATA			Connector Information	
Frequency Range		DC – 18 GHz	Forward Connector	Type BMA (F) Right angle Connector (47352)
Shielding Effectiveness		-90 dB (Min.)		Connector Body- Stainless Steel, Passivated
VSWR (max)		18GHz = 1.6		Center Contact-Beryllium copper, Gold Plated.
Capacitance value		30pF/ft(Max)		
Insertion Loss			After Connector	Type TNC (M) Straight Connector (48782)
Freq. (GHz)	dB (Max.)			Connector Body- Beryllium copper, Gold Plated
2	0.52			Center Contact-Beryllium copper, Gold Plated
6	0.65			
10	0.79			
14	0.9			
17	1.12			

MECHANICAL INFORMATION

Center Cont	Solder	
Outer Cont	Crimp	
Coupling Nut Torque (N.m)	N/A	
Cbl-Connector Retention Force (N)	500	
Climatic Class	IEC 60068 / 55/155/56	
Durability (cycles)	500	

DIMENSION

COMPONENTS	MATERIALS	FINISH	Thk. (μ")	
Body	Brass	Albaloy	80	
Center Cont	Brass	Gold	50	
Ferrule	Brass	Albaloy	80	
Nut	Brass	Albaloy	80	
Insulator	PTFE			
Gaskt	Silicone			

Dwg No.	Marker 1	Marker 2	Marker 3
491117880113 A3	J7	STK-602228991224 BEL P/N: 491117880113	J7
491117880210A3	J6	STK-602228991321 P/N: 491117880210	J6

