



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Page No.


1 of 1

Nomenclature: CONN RECEPTACLE RF 50 OHMS

STK-571121401236

CONN RECEPTACLE RF 50 OHMS

OUTLINE DRAWING

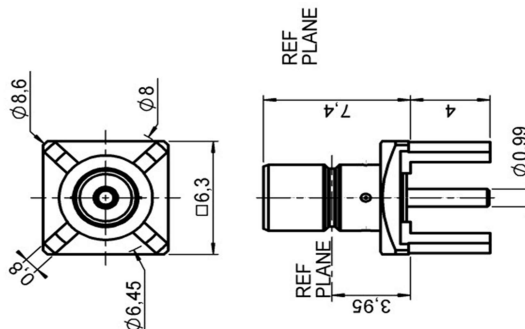

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-4 GHz
VSWR	$1.05 + 0.0080 \times F(\text{GHz})$ Maxi
Insertion loss	$0.03 \times \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (57 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	1000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	65°C ~ 165°C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	10 N mini
Opposite end	10 N mini
Mating life	500 Cycles mini
Weight	0,5409 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		BRASS			GOLD 0.2 OVER NICKEL 2		
CENTER CONTACT		BRASS			GOLD 1.3 OVER NICKEL 2		
OUTER CONTACT		-			-		
INSULATOR		PTFE			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in