



STK SERIES CONNECTOR



www.rfconnector.in



Page No.


1 of 1

Nomenclature:CONNECTOR SMA-F

STK-571123981436

CONNECTOR SMA-F

OUTLINE DRAWING

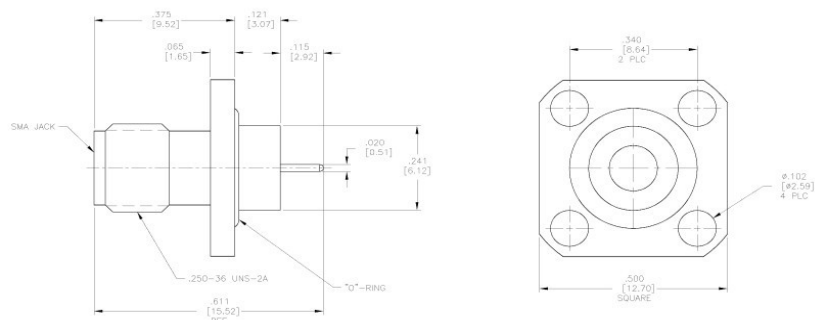

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 18 GHz
VSWR	$\leq 1.30:1$ (typical)
Insertion Loss	≤ 0.2 Db
DielectricWithstandingVoltage	≥ 1000 V RMS
nsulation Resistance	≥ 5000 M Ω

ENVIRONMENTAL INFORMATION

Operation temperature	-55 °C to +125 °C
-----------------------	-------------------

MECHANICAL INFORMATION

Weight	-
--------	---

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				
BODY		STAINLESS STEEL		GOLD				
CENTER CONTACT		BERYLLIUM COPPER		GOLD				
DIELECTRIC		PTFE		-				
O RING		SILICON RUBBER		-				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.