



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50 SMA PL M 2 HOLE FL MT Au/Ni




Page No.

1 of 1

STK-571126651264

CON RF50 SMA PL M 2 HOLE FL MT Au/Ni

OUTLINE DRAWING

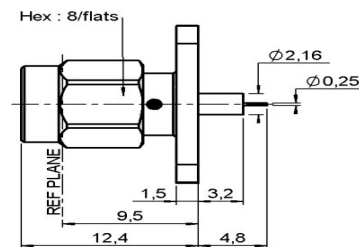

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	$1.06 + 0.002 \times F(\text{GHz})$ Maxi
Insertion loss	$0.07 \times \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	$-(60 - F(\text{GHz}))$ dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	27 N mini
Opposite end	27 N mini
Torque	2.8 N.cm mini
Mating	100 N.cm
Mating life	500 Cycles mini
Weight	3.264 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		STAINLESS STEEL		GOLD 0.5 OVER NICKEL 2			
CENTER CONTACT		BRASS		GOLD 2.5 OVER NICKEL 2			
INSULATOR		PTFE		-			
GASKET		SILICONE RUBBER		-			
OTHERS PARTS		STAINLESS STEEL		GOLD 0.5 OVER NICKEL 2			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in