



www.rfconnector.in




Page No.

1 of 1

STK-571126931885

CONN RF50 N(M) ST PL FOR LMR 240 CA

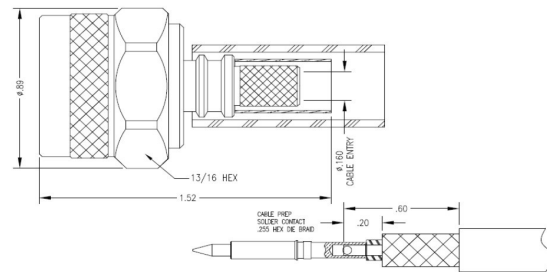

TECHNICAL DATA

Impedance	50 Ω
VRMS	750 VRMS @ 60 Hz
Frequency Range	6 GHz

Operation temperature	-65°C TO +165°C
-----------------------	-----------------

Mating
Weight

COMPONENTS	MATERIAL	PLATING
BODY		
CONTACT	BRASS	
LOCKING RING	PHOSPHOR BRONZE	
CRIMP FERRULE	SOFT COPPER	
OTHER PART	BRASS	
FGASKET	SILICON RUBBER	
INSULATORS		

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in