

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

Nomenclature:CONNECTOR RF50 SMP RA RP PCB FULLDETENT


Page No.

1 of 1

STK-571127571212

CONNECTOR RF50 SMP RA RP PCB FULLDETENT

OUTLINE DRAWING

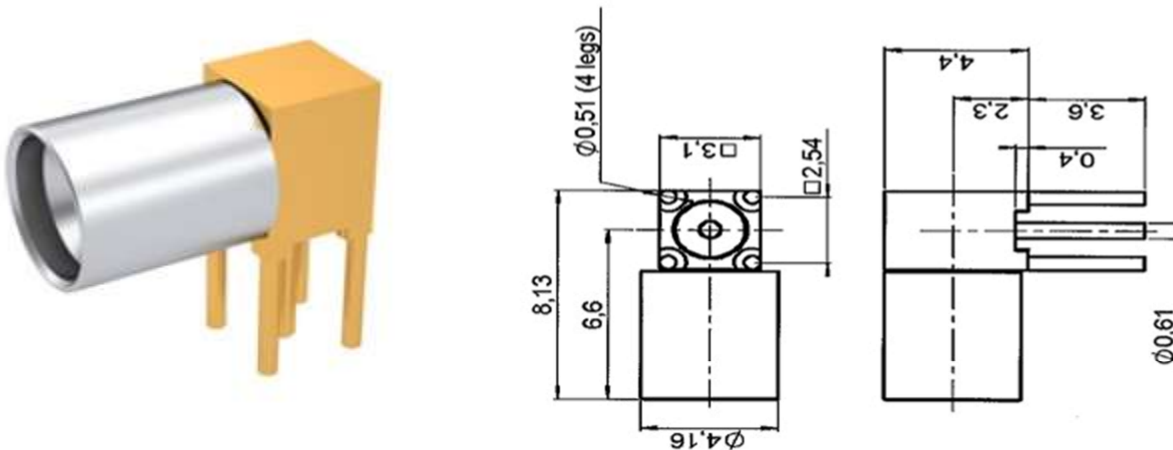

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12 GHz
VSWR	$1.25 + 0.000 \times F(\text{GHz})$ Maxi
Insertion loss	$0.1 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 veff Maxi
Dielectric with voltage	500 veff mini
Insulation resistance	5000 M Ω Mini

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	STAINLESS STEEL + BRASS	PASSIVATED + GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
OUTER CONTACT		
INSULATOR	PTFE	

ENVIRONMENTAL INFORMATION

Operating	-65/+165 ° C
-----------	--------------

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	-----------------------------	---	---

MECHANICAL INFORMATION

Axial force mating end				6.8 N.mini				
Axial force Opposite end				6.8 N.mini				
Torque				NA N.cm mini				
Mating				NA N.cm mini				
Mating life				100 Cycles mini				
Weight				0.600 g				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in