



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 SMP MALE ST RECP PCB SLDR LEG


Page No.

1 of 1

STK-571127611467

CONN RF50 SMP MALE ST RECP PCB SLDR LEG

OUTLINE DRAWING

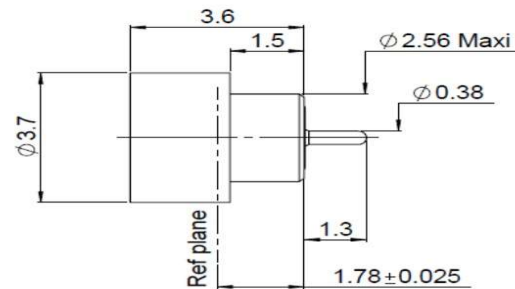

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40* GHz
VSWR	1.15** + 0,0000 x F(GHz) Max
Insertion loss	0.12* √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 °C
-----------------------	-------------

MECHANICAL INFORMATION

Mating End	6.8 N mini
Mating life	100 Cycles mini
Weight	0.2200 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		DILVER P1		GOLD OVER NICKEL			
Center Contact		DILVER P1		GOLD OVER NICKEL			
Insulator		GLASS					
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in