



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: RIGHT ANGLE PLUG CRIMP TYPE CABLE 2.6/50 D-BR


Page No.

1 of 1

STK-571127641343

RIGHT ANGLE PLUG CRIMP TYPE CABLE 2.6/50 D-BR

OUTLINE DRAWING

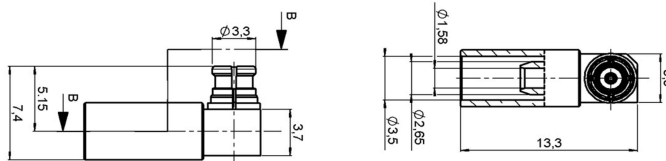

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4* GHz
VSWR	1.25** + 0,0000 x F(GHz) Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (55 - F(GHz)) dB Max
Voltage rating	250 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55/+125 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	6.8 N mini
Opposite end	6.8 N mini
Panel nut	N.cm
Mating life	100 Cycles mini
Weight	1,1300 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		BRASS			NPGR		
CENTER CONTACT		BERYLLIUM COPPER			NPGR		
OUTER CONTACT		BERYLLIUM COPPER			NPGR		
INSULATOR		PTFE			-		
OTHER PARTS		BRASS			GOLD 0.2 OVER NICKEL 2		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in