



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in





**Nomenclature: TWO HOLE FLANGE MALE JACK SMOOTH BORE
SOLDER TYPE CABLE**

Page No.
1 of 1

STK-571128321507

**TWO HOLE FLANGE MALE JACK SMOOTH BORE
SOLDER TYPE CABLE**

OUTLINE DRAWING

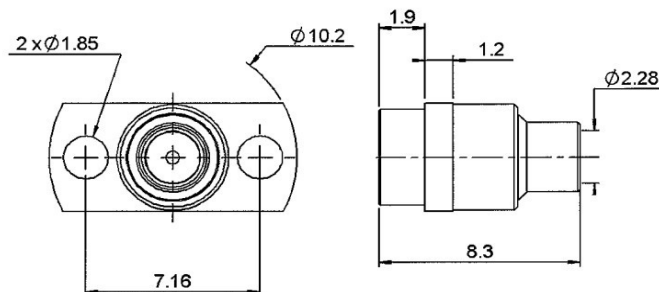

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40 GHz
VSWR	$1.50 + 0.0000 \times F(\text{GHz})$ Maxi
Insertion loss	$0.12 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (- F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	NA N mini
Opposite end	NA N mini
Torque	NA N.cm mini
Mating life	1000 Cycles mini
Weight	0,750 g

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	STAINLESS STEEL + BRASS	PASSIVATED + GOLD1.3 OVER NICKEL2
Center contact	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
Insulator	PTFE	-
Gasket	-	-
Others parts	-	-
Originated	Date	Approved
Sang	01.12.25	Krishnamurthy
Synergy Telecom P Ltd,		
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India		

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in