



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF SMA(M) 50OHM 18GHZ

Page No.

1 of 1


STK-571182731232

CONN RF SMA(M) 50OHM 18GHZ

OUTLINE DRAWING



Hex .315/flats
(hex. 8/Plats)

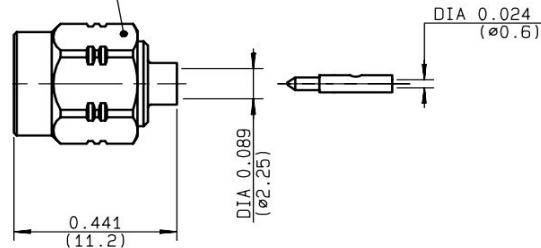

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	1.07 + 0.01 x F(GHz) Maxi
Insertion loss	0.05 √F(GHz) dB Max
RF leakage	NA
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+105 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating	60 cm.N
Opposite end	NA
Panel nut	NA
Durability	100 Cycles mini
Weight	2.25 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)			
BODY		STAINLESS STEEL			GOLD 0.2 OVER NICKEL 2			
CENTER CONTACT		BRASS			GOLD 1.3 OVER COPPER 2.5			
INSULATOR		PTFE						
OTHERS PARTS		BRASS			GOLD 0.2 OVER NICKEL 2			
GASKET		SILICONE RUBBER			-			
OUTER CONTACT								
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in