


 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	------------------------------------	---	---

Nomenclature: CON.RF50 SMP RP ST M FMT

Page No.
1 of 1

STK-571183051235	CON.RF50 SMP RP ST M FMT
--------------------------------	---------------------------------

OUTLINE DRAWING

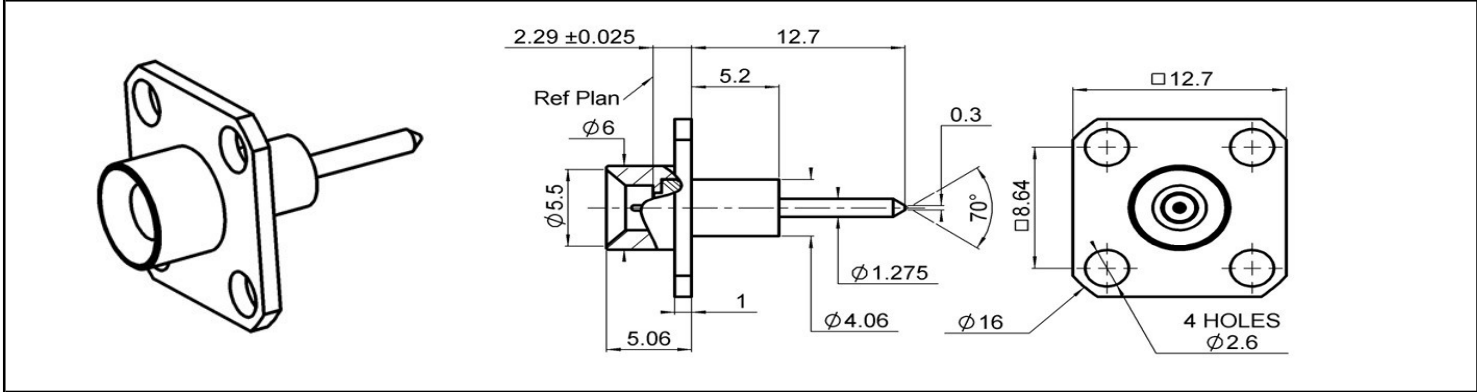

TECHNICAL DATA

ELECTRICAL DATA	
Impedance	50 Ω
Interface Frequency	0-12 Ghz
VSWR	1.2* + 0,0000 x F(GHz) Maxi
Insertion loss	0.1 √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding Vlt	500 Veff mini
Insulation resistance	5000 MΩ mini

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	STAINLESS STEEL	PASSIVATED.
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
OUTER CONTACT	-	-
INSULATOR	PTFE	-

ENVIRONMENTAL INFORMATION

Operating	-65 °C to 165 °C
-----------	------------------

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
--	------------------------------------	---	---

MECHANICAL INFORMATION

Mating end				6.8 N mini			
Axial force – Opposite end				6.8 N mini			
Mating life				1000 Cycles mini			
Weight				1,8300 g			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				-	-	-	-
				 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in			

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in