



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: ADAPTER N-F SMA-F FMt 4H SS


Page No.

1 of 1

STK-571581121290

ADAPTER N-F SMA-F FMt 4H SS

OUTLINE DRAWING

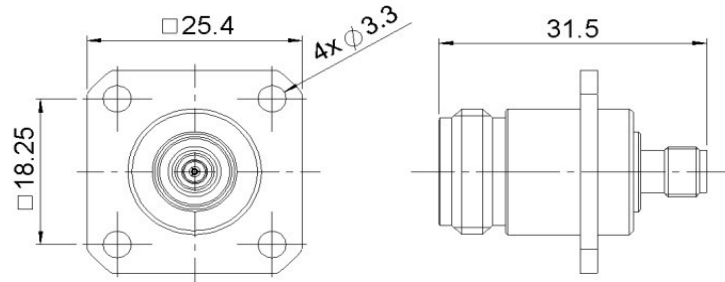

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 GHz
V.S.W.R	$1.30 + 0.0000 \times F(\text{GHz})$ Maxi
Insertion loss	$0.05 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (101 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55°C ~ 155°C
-----------------------	---------------

MECHANICAL INFORMATION

Mating End	*18 N mini
Opposite end	*18 N mini
Mating life	500 Cycles mini
Weight	35,6900 g

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		NICKEL			
CENTER CONTACT		BERYLLIUM COPPER		GOLD OVER NICKEL			
INSULATOR		PTFE		-			
OTHER PARTS		BERYLLIUM COPPER		NICKEL			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in