



HIGH PERFORMANCE DISH ANTENNA-SEL-5829WG-MSD

DISH ANTENNA (4.9 - 5.9 GHz) FOR WIRELESS COMMUNICATIONSP-P

Electrical Parameters

Frequency (MHz)	4900 – 5900
Gain (dBi)	29 ± 1
VSWR (Max)	1.4 : 1
Cross-pol Supression	>25
Polarization	Linear V & H
Port to Port Isolation (dB)	>30
Max. Power Input (Watts)	100
Impedance (Ω)	50
Front to Back Ratio (dB)	>35
Safety Requirements	As per IEC standards
Connector Termination	2 x SMA (rp)/ N MALE or Customized
Beam-width	6°



Mechanical Parameters

Dimension (mm)	Ø 650 MM
Antenna Material	ALLOY (FE+AL)
Gross Weight (Kg)	8±1
Packing Dimension (inch)	26.5 X 26.5 X 8
Mounting Hardware	MS Galvanized & Powder Coated
Mounting Style	Tower and Pole
Mounting Pole Diameter (MM)	100 mm Max.
Mounting Adjustment	H Plane ± 45°
	V Plane ± FINE 10°



Environmental Parameters

Temperature Range (°C)	(-) 50 to (+) 65
Wind Speed (km/hr)	200
Humidity	95% No Condensation



SYNERGY TELECOM PVT LTD

FEW MORE CLOSEUPS




WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN



TEST REPORT SEL-5829WG-MSD PORT-1

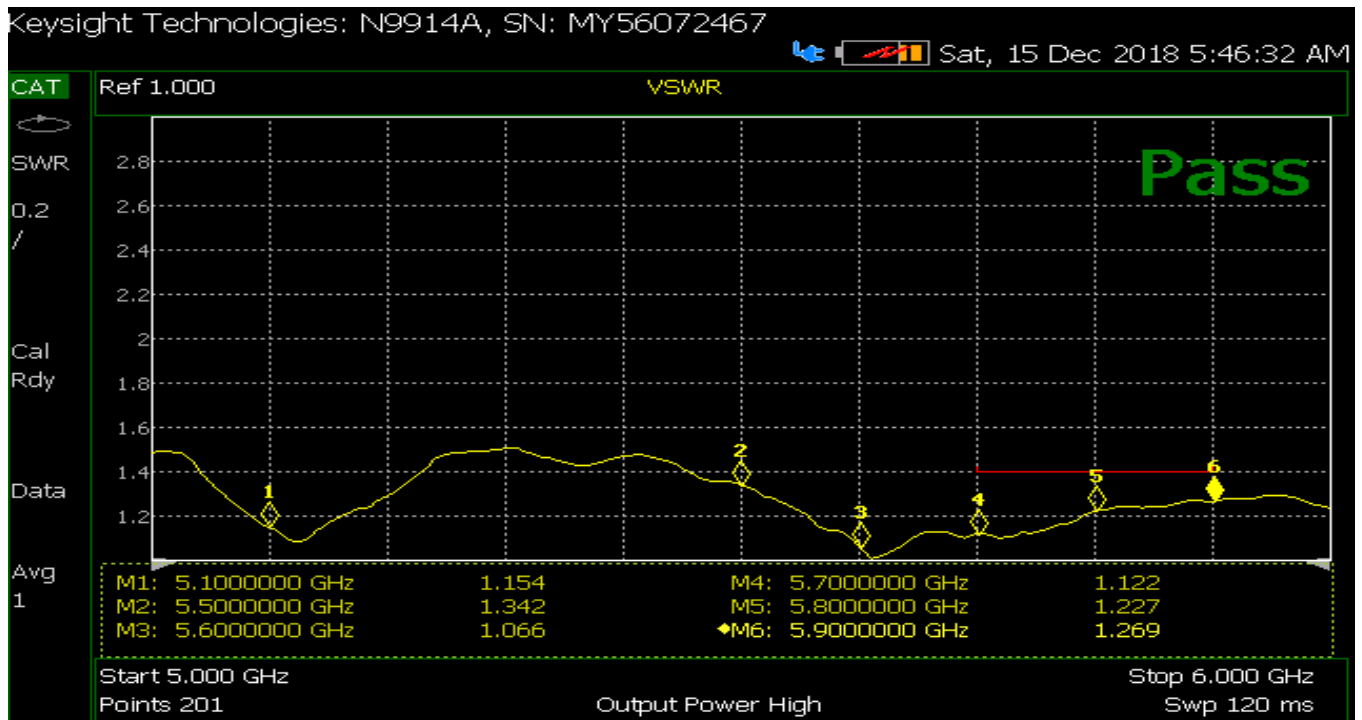

TEST REPORT SEL-5829WG-MSD PORT-2

