




Technical Specifications

ST-C2.925G3.675G

1. Technical Parameter

SN	Items	Requirements
1	Frequency	2.925-3.675GHz
2	Insertion loss	$\leq 1.5\text{dB}$
3	Ripple	$\leq 0.3\text{dB}$
4	Rejection	$\geq 50\text{dBc}@1.4-1.9\text{GHz}$; $\geq 40\text{dBc}@5.8-7.4\text{GHz}$; $\geq 35\text{dBc}@8.7-11.1\text{GHz}$;
5	VSWR	≤ 1.5
6	Port	0.38mm Pin
7	Operation Temp.	$-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$
8	Storage Temp.	$-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$
9	Material and Surface	Cu H62, Silver plating
10	Dimensions	30*21*8mm ($\pm 0.1\text{mm}$)

2. Outline Drawing

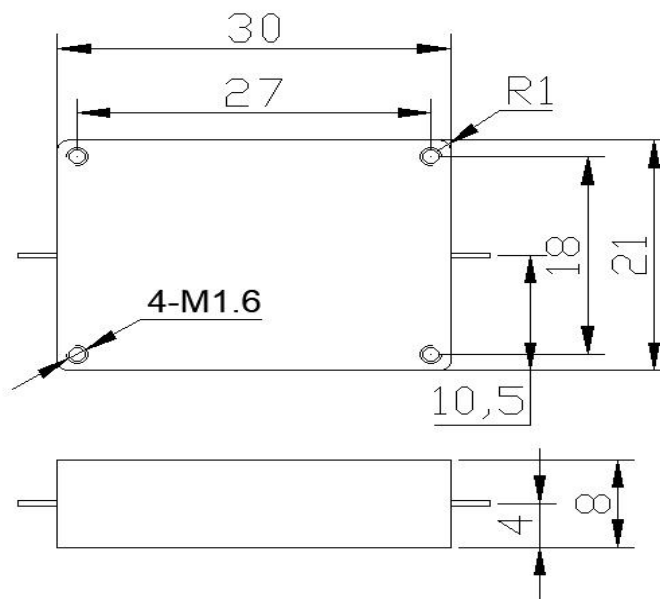




Technical Specifications

ST-C5.85G7.35G

1. Technical Parameter

SN	Items	Requirements
1	Frequency	5.85-7.35GHz
2	Insertion loss	$\leq 1.5\text{dB}$
3	Ripple	$\leq 0.3\text{dB}$
4	Rejection	$\geq 50\text{dBc}@2.9-3.7\text{GHz}$; $\geq 50\text{dBc}@8.7-18\text{GHz}$
5	VSWR	≤ 1.5
6	Port	0.38mm Pin
7	Operation Temp.	$-40^{\circ}\text{C}\sim 70^{\circ}\text{C}$
8	Storage Temp.	$-55^{\circ}\text{C}\sim 85^{\circ}\text{C}$
9	Material and Surface	Cu H62, Silver plating
10	Dimensions	34*15*8mm ($\pm 0.1\text{mm}$)

2. Outline Drawing

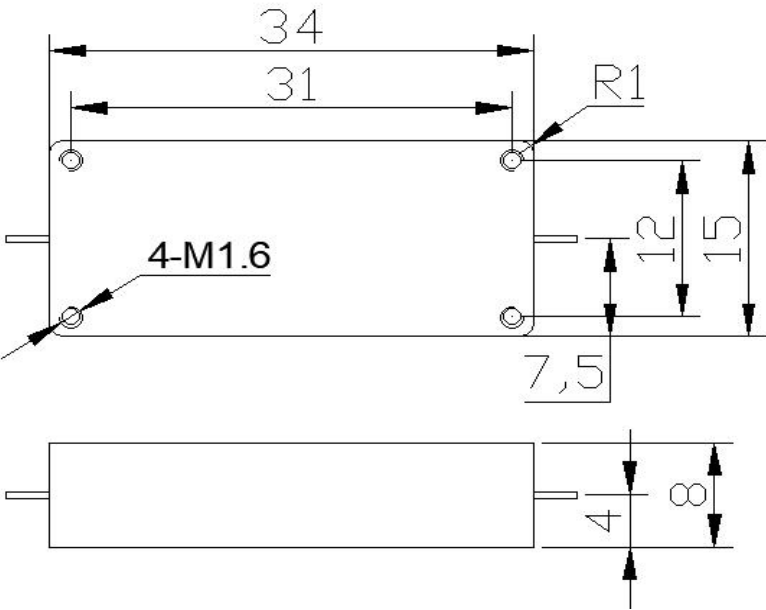




Technical Specifications

ST-C11.7G14.7G

1. Technical Parameter

SN	Items	Requirements
1	Frequency	11.7-14.7GHz
2	Insertion loss	$\leq 1.5\text{dB}$
3	Ripple	$\leq 0.5\text{dB}$
4	Rejection	$\geq 50\text{dBc}@2.9-7.4\text{GHz}$; $\geq 40\text{dBc}@15.2-29.4\text{GHz}$
5	VSWR	≤ 1.5
6	Port	0.38mm Pin
7	Operation Temp.	$-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
8	Storage Temp.	$-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
9	Material and Surface	Cu H62, Silver plating
10	Dimensions	50*12*7mm ($\pm 0.1\text{mm}$)

2. Outline Drawing

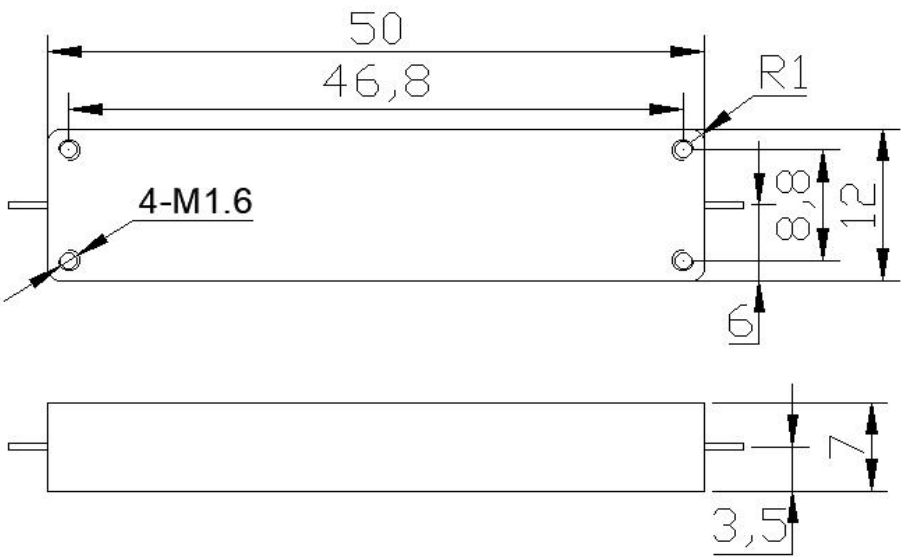




Technical Specifications

ST-C15.2G18.2G

1. Technical Parameter

SN	Items	Requirements
1	Frequency	15.2-18.2GHz
2	Insertion loss	$\leq 1.5\text{dB}$
3	Ripple	$\leq 0.5\text{dB}$
4	Rejection	$\geq 50\text{dBc@DC-14.3GHz}$; $\geq 40\text{dBc@19.2-26.5GHz}$
5	VSWR	≤ 1.5
6	Port	0.38mm Pin
7	Operation Temp.	$-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$
8	Storage Temp.	$-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$
9	Material and Surface	Cu H62, Silver plating
10	Dimensions	40*12*7mm ($\pm 0.1\text{mm}$)

2. Outline Drawing

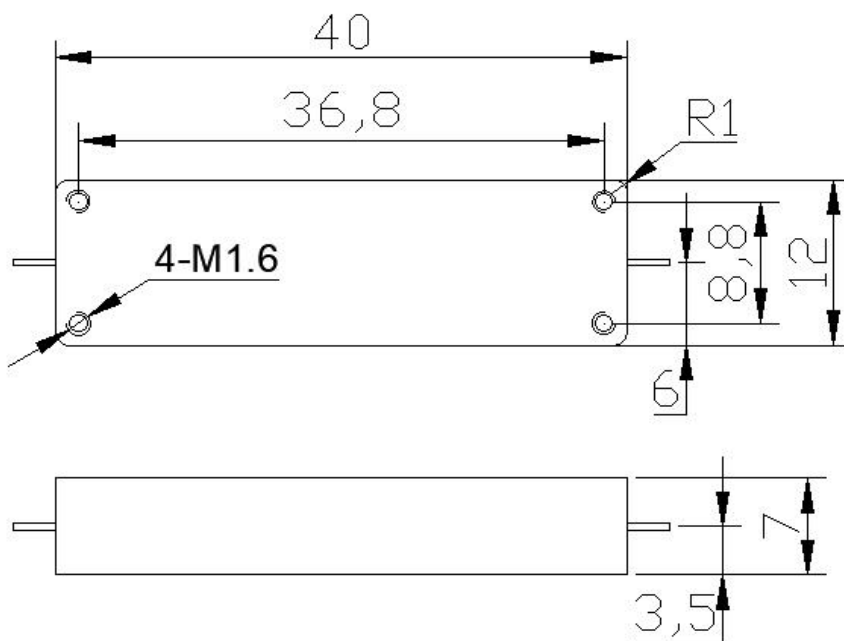



Technical Specifications

ST-C1462.5M1837.5M

1. Technical Parameter

SN	Items	Requirements
1	Frequency	1462.5-1837.5MHz
2	Insertion loss	$\leq 2.5\text{dB}$
3	Ripple	$\leq 0.5\text{dB}$
4	Rejection	$\geq 50\text{dBc}@0.7-1\text{GHz}$; $\geq 40\text{dBc}@2.4-3.1\text{GHz}$; $\geq 45\text{dBc}@3.3-3.7\text{GHz}$
5	VSWR	≤ 1.5
6	Port	0.38mm Pin
7	Operation Temp.	$-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
8	Storage Temp.	$-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
9	Material and Surface	Cu H62, Silver plating
10	Dimensions	36*12*8mm ($\pm 0.1\text{mm}$)

2. Outline Drawing

