



ST-1206000i-30W

Product Features

- Frequency range from 120 ~ 6000MHz for 10-200M bandwidth
- Class AB GaN design
- Instantaneous widebandwidth
- 50 Ohm Input/ Output impedance
- Small size and Light weight
- High reliability and Ruggedness
- Ultra-wide digital interference source

Description

The AMP1206000-30W-28V is designed for general purpose. Operating frequency range is from 100~6000MHZ, Customize any 10-200 MHz bandwidth. Gallium Nitride on GaN Technology is used and attached on a copper sub-carrier. Improved thermal handling by patented technology.

Electrical Specifications @ $V_{DC}=24-32V$ (Wide voltage input), $T_c=50^\circ C$, 50 Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency range	MHz	120	-	6000	F _o
Operating Bandwidth	MHz	-	200	-	BW
Peak Output Power @ CW Signal	W	-	30	-	P _{SAT}
Input Power	dBm	-	-	-	P _{IN}
Maximum Input Power @ Without Damage	dBm	-	-	-	P _{IN, MAX}
Power Gain @ Input Power 0 dBm	dB	-	45	-	G _P
Gain Flatness @ Input Power 0 dBm	dB	-	-	±1	ΔG _P
Efficiency	%	50	52	55	E _{FF}
Harmonics 1 to N @ Output Power 30W	dBc	12	13	15	H _N
Spurious Level	dBc	60	-	-	Spur
Input VSWR	dB	-	-	-	VSWR
Output VSWR	dB	-	-	2:1	VSWR
Operating Voltage	V	24	28	32	V _{DC}
Current Consumption @ Output Power 30W	A	-	2.5	-	I _{DC}

Environmental Specifications


PARAMETER	UNIT	RATING	SYMBOL
Operating Case Temperature	°C	-20 ~ 85	T _c
Storage Temperature	°C	-40 ~ 105	T _{STG}
Relative Humidity (Non-condensing)	RH	95	%





ST-1406000i-30W

Outline Drawing



* Unit: mm[inch] Tolerance ± 0.2 [.0078]

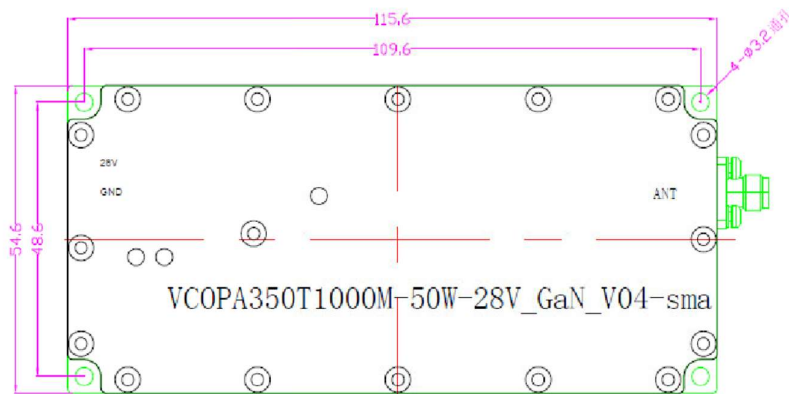

350-1000MHz Drawing

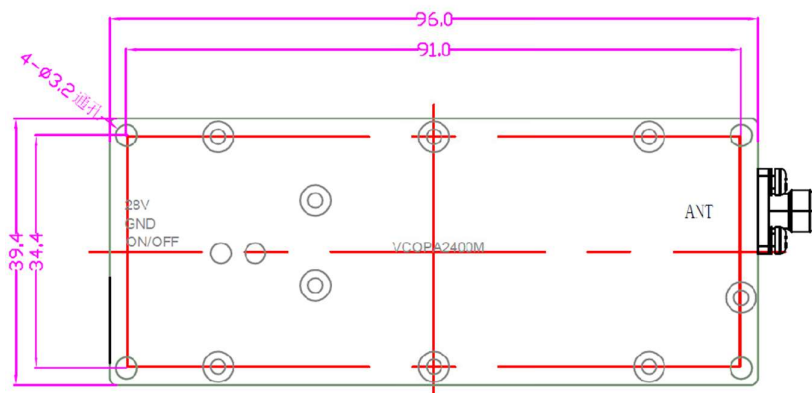

1100-2700MHz Drawing

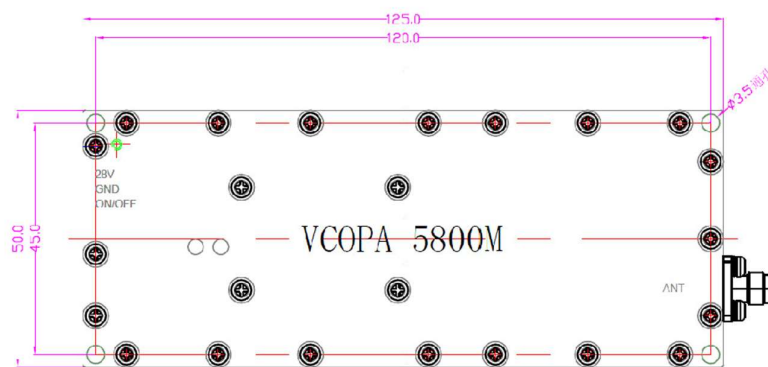

3000-5900MHz Drawing

