




COAXIAL FIXED TERMINATION

Model TF5000 Oil-cooled 5000 Watts DC-1GHz

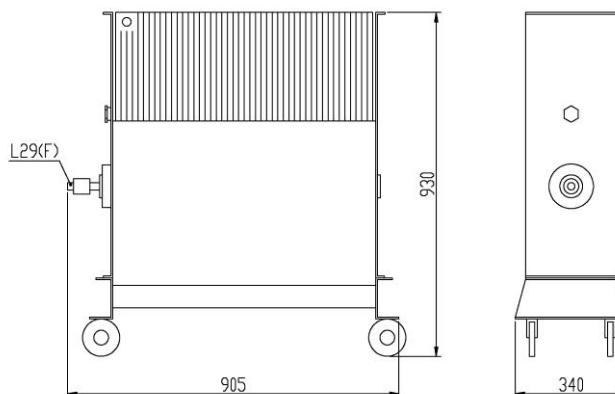

Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

TF serial oil-cooled high power coaxial fixed termination's average power from 1KW-10KW, frequency range from DC-2GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Phosphor Copper Gold Plated
Housing	Aluminum, Gray Powder Coat
Temp Range	-40° C ~ +45° C
Dimensions	905×340×930mm
Weight	110Kg

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (GHz)	Max VSWR
TF5000	DC-30	1.10
	30-88	1.15
	88-500	1.25
	500-1000	1.45*

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 5000W

PEAK POWER: 100KW (5μs pulse width with 5% duty cycle)

COOLING METHOD: oil-cooled+ forced air cooling draft

CONNECTOR TYPE: L29(DIN7/16) ,L36,L52 ,IF70(1-5/8 EIA)

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN