


THROUGH-LINE POWER METER & VSWR/SWR METER — 150 W

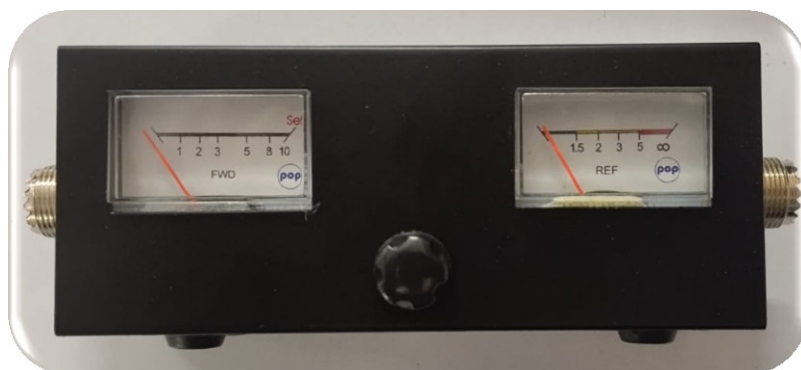

Electrical Specifications

Parameter	Typical Value / Range
Frequency Range	1 MHz – 1 GHz (model dependent)
Power Handling (CW)	150 W
Impedance	50 Ω
VSWR (throughline)	$\leq 1.15:1$
Insertion Loss	< 0.2 dB
Forward Power Range	0 – 150 W
Reflected Power Range	0 – 150 W
VSWR / SWR Measurement Range	1.0 – 4.0 (or up to 10:1 in some versions)
Accuracy (Power)	± 5 % of reading
Accuracy (VSWR/SWR)	± 0.2 (typical)
Coupling Factor	~ 30 dB

Mechanical & Environmental

Parameter	Typical Value
Connectors	N-type (50 Ω), others optional (BNC, TNC, SMA)
Housing	Aluminum / extruded
Dimensions (approx.)	120 $\times$ 60 $\times$ 30 mm
Weight	~ 300 g
Operating Temp	-10 $^{\circ}\text{C}$ to $+55$ $^{\circ}\text{C}$
Storage Temp	-20 $^{\circ}\text{C}$ to $+70$ $^{\circ}\text{C}$