




COAXIAL FIXED TERMINATION

Model GTF3000 3000 Watts DC-3GHz

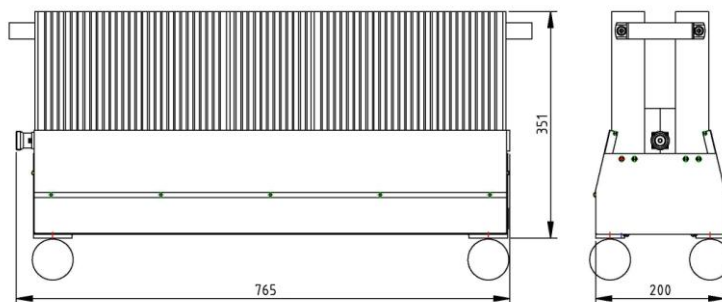

Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

GTF serial high power coaxial fixed termination's average power from 1KW-3KW, frequency range from DC-4GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Silver Plated
Female Pin	Beryllium Copper Silver Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +125° C
Dimensions	765×200×351mm
Weight	37Kg

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (GHz)	Max VSWR
GTF3000-1	DC-1	1.20
GTF3000-2	DC-2	1.25
GTF3000-3	DC-3	1.40

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 3000W average to 25°C ambient temperature, derated linearly to 300W @ 125°C.

PEAK POWER: 10KW (5μs pulse width with 10% duty cycle)

COOLING METHOD: Forced Draft

CONNECTOR TYPE: L29(7/16Din)

Notes:

1. Dimensions Tolerance ±3%
2. Dimensions and specifications refer to connector type N unless otherwise specified.
3. Custom designs available.