



STK SERIES CONNECTOR



www.rfconnector.in




Nomenclature: CON RF50 TNC FL MOUNT.18G,0.018 DIA

Page No.

1 of 1

STK-571127001240	CON RF50 TNC FL MOUNT.18G,0.015 DIA
STK-571127001337	CON RF50 TNC FL MOUNT.18G,0.018 DIA
STK-571127001434	CON RF50 TNC FL MOUNT.18G,0.020 DIA
STK-571127001531	CON RF50 TNC FL MOUNT.18G,0.036 DIA

OUTLINE DRAWING

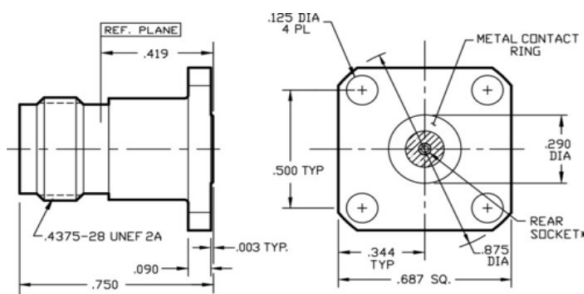

TECHNICAL DATA

ELECTRICAL DATA

Frequency Range	DC to 18.0 GHz	
VSWR	DC to 18.0 GHz: 1.15:1 MAX	
RF Leakage	< -100 Db	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	STAINLESS STEEL	PASSIVATED
CENTERCONTACT	BERYLLIUMCOPPER	SILVER
INTERFACE	PER	-
INSULATOR	PTFE	-

ENVIRONMENTAL INFORMATION

Temperature range				-55°C to 165°C				
Hermetic seal								
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50 TNC FL MOUNT.18G,0.018 DIA

Page No.

1 of 1

STK-571127001628	CON ACCS,SEAL HERMATIC 0.015 DIA
STK-571127001725	CON ACCS,SEAL HERMATIC 0.018 DIA
STK-571127001822	CON ACCS,SEAL HERMATIC 0.020 DIA
STK-571127001919	CON ACCS,SEAL HERMATIC 0.036 DIA
STK-571127002016	CON ACCE HERMTIC TRNSITIONS TO μ SP FT
STK-571127002113	CON ACCE HERMTIC TRNSITIONS TO μ SP ϕ 0.080
STK-571127002307	CON ACCE HERMTIC TRNS μ SP CKT DIA 0.009
STK-571127002404	CON ACCE HERMTIC TRNS μ SP CKT DIA 0.009
STK-571127002501	CON ACCE HERMTIC TRNS μ SP CKT DIA 0.009

OUTLINE DRAWING

P-1 Side View Dimensions: (.2375), .050, .125, .0625, .015, .0985	P-2 Side View Dimensions: (.312), .072, .180, .060, 2X .018, .110	P-3 Side View Dimensions: (.235), .050, .125, .060, .020, .158					
P-4 Side View Dimensions: (.175), .040, .080, .012, .055, .076	P-5 Side View Dimensions: (.175), .040, .080, .012, .055, .076	P-6 Side View Dimensions: (.342), .098, .184, .036, .060, .268					
P-7 Side View Dimensions: (.112), .031, .026, .009, .055, .068	P-8 Side View Dimensions: (.166), .031, .080, .009, .055, .068	P-9 Side View Dimensions: (.206), .031, .120, .009, .055, .068					
Originated	Date	Approved	Date	Rev	Amend	Name	Date



