



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 N PL M CAB3.58


Page No.

1 of 1

STK-571151411290

CONN RF50 N PL M CAB3.58

OUTLINE DRAWING

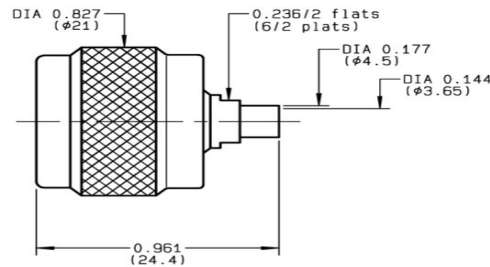

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC-11Ghz
Working voltage	335 v _{eff} maxi
VSWR	1.15+Xf (Ghz) Maxi
RF Inserting loss	0.048 F(ghz) db Maxi
Mechanical durability	500 cycles
Weight	24.86 gr

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
OUTER CONTACT	-	-
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2
OTHERS PIECES	BRASS	BBR 2
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-

ENVIRONMENTAL INFORMATION

Temperature range	-55/+105 °C
-------------------	-------------

MECHANICAL INFORMATION

CABLE RETENTION	500 N MINI
MATING	130 CM.N
CLAMP NUT	NA CM.N

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in