

◆ COAXIAL SWITCH

ST-6GHz

High Power

Failsafe / Latching

◆ RF Characteristics

Frequency (GHz)	Ins.loss (dB)	Isolation (dB)	VSWR	RF Power CW (W)
DC-6	0.3	70	1.3	650



◆ Operating Voltage/Coil Current

Operating Voltage(V)	12	24	28
Coil Current (mA)	Failsafe	350	200
Latching	400	200	185

* It can be selected according to user requirements

TTL	TTL Low(V)	TTL High	
	0-0.3	3~5V	20mA
Indicators	Withstand Voltage V (max)	Current capacity mA(max)	Resistance Ω (max)
	50	100	15


* Connect VDC & GND before the function operates

◆ Product Functions

- DC to 6GHz
- Low loss, Low VSWR, High Isolation
- SC Female Connector
- Selectable TTL driver control


◆ Outline Drawing

Solder Pins

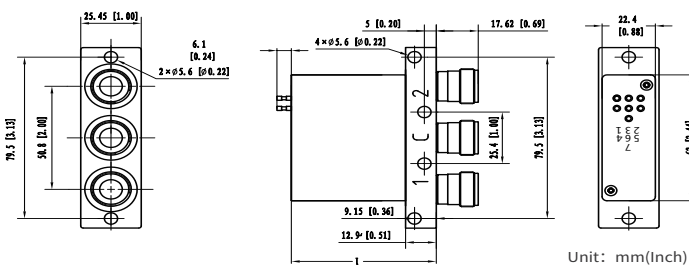

L = 61(Non TTL/TTL/Indicators)

D-SUB Male

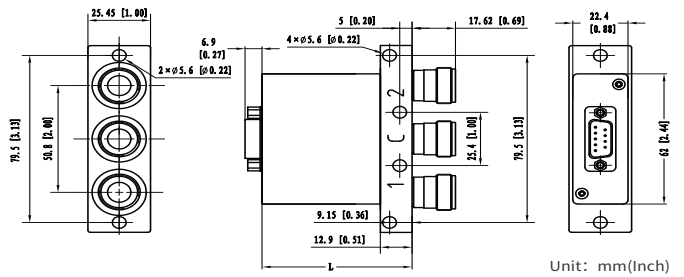

L = 64(Non TTL/TTL/Indicators)

Specifications

Switching Sequence: Break before Make

Switching Time: 15ms max

Storage temperature: -55°C~85°C

Operating temperature: -25°C~65°C(Standard)
-45°C~85°C(Extended1)
-55°C~85°C(Extended2)

Mechanical Life Cycles: 2 million cycles

RF Connectors: SC Female

Impedance: 50Ω

Mechanical Shock, Non-Operating: 50G, 1/2 Sine, 11 ms


Vibration Operating: 20-2000 Hz, 10G RMS

Actuator Terminals: Solder Pins/D-SUB 9Pin Male

Weight: 240g

SPDT SC 6GHz Truth Table/Product Selection

2 × UNC#4-40▽4
[Depth 0.157]



◆ Truth Table

DB9 male

Failsafe Non TTL			
Actuator Terminals		RF Connector	
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	No Power,RF 1-0	
1	V	RF 2-0	
2	N/A	-	
3	GND	-	
4	Ind.1	Indicators	RF 1-0
5	Ind.2		RF 2-0
6	Ind.com		-
7	VDC		-
8~9	N/A	-	

Failsafe TTL			
Actuator Terminals			RF Connector
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	No Power,RF 1-0	
1	VDC	RF 2-0	
2	TTL	-	
3	GND	-	
4	Ind.1	Indicators	RF 1-0
5	Ind.2		RF 2-0
6	Ind.com		-
7~9	N/A	-	

Latching Non TTL			
Actuator Terminals		RF Connector	
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	-	
1	V1	RF 1-0	
2	V2	RF 2-0	
3	GND	-	
4	Ind.1	Indicators	RF 1-0
5	Ind.2		RF 2-0
6	Ind.com		-
7	VDC		-
8~9	N/A	-	

Latching TTL			
Actuator Terminals			RF Connector
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	-	
1	VDC		
2	TTL	RF 1-0	
3	GND	-	
4	TTL	RF 2-0	
5	Ind.1	Indicators	RF 1-0
6	Ind.2		RF 2-0
7	Ind.com		-
8~9	N/A	-	

◆ Product Selection

Series	Number Of Positions	Rf Connectors	Type	Frequency	Actuator Voltage	Terminated	Driver	Operating Temperature	Install	Control connector
E	2	C		06		W			S	
Standard Series	SP2T	SC	L: Latching F: Failsafe	DC~6GHz	05: 5V 12: 12V 24: 24V 28: 28V	No Terminated	0: Negative common 1: TTL Driver 2: Positive Common 3: Self Cutoff 4: Negative common And Indicators 5: TTL driver And Indicators 6: Positive Common And Indicators	0: Standard (-25°C~65°C) 1: Extended1 (-45°C~85°C) 2: Extended2 (-55°C~85°C)	Normal	0: Solder Pins 1: D-Sub 9 Male (2 rows)