

◆ COAXIAL SWITCH

ST-N 6GHz High Power Failsafe / Latching

◆ RF Characteristics

Frequency (GHz)	Ins.loss (dB)	Isolation (dB)	VSWR	RF Power CW (W)
DC-6	0.3	70	1.3	350

◆ Operating Voltage/Coil Current

Operating Voltage(V)		12	24	28
Coil Current (mA)	Failsafe	300	180	150
	Latching	320	180	150


* It can be selected according to user requirements

TTL	TTL Low(V)	TTL High	
	0-0.3	3~5V	20mA
Indicators	Withstand Voltage V (max)	Current capacity mA(max)	Resistance Ω (max)
	50	100	15

* Connect VDC & GND before the function operates


◆ Outline Drawing

Solder Pins

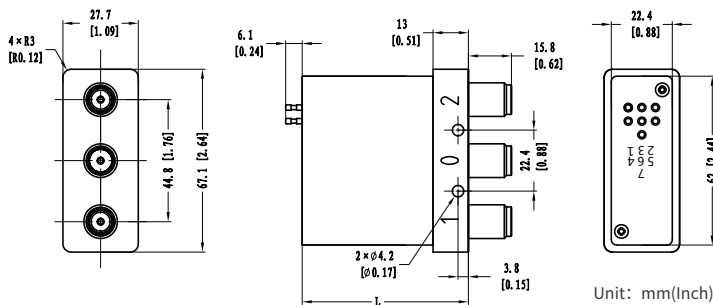

L = 61(Non TTL/TTL/Indicators)

D-SUB Male

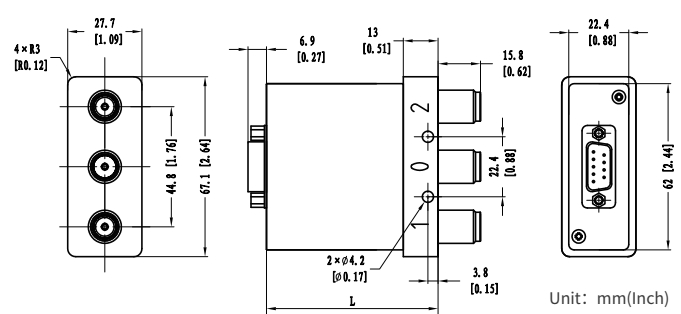

L = 64(Non TTL/TTL/Indicators)

Specifications

Switching Sequence: Break before Make

Mechanical Life Cycles: 2 million cycles

Mechanical Shock,Non-Operating: 50G、1/2 Sine、11 ms

Switching Time: 15ms max

RF Connectors: N Female

Vibration Operating: 20-2000 Hz、10G RMS

Storage temperature: -55°C~85°C

Impedance: 50Ω

Actuator Terminals: Solder Pins/D-SUB 9Pin Male

Operating temperature: -25°C~65°C(Standard)

-45°C~85°C(Extended1)


-55°C~85°C(Extended2)

Weight: 250g

SPDT N 6GHz Truth Table/Product Selection

 $2 \times \text{UNC}\#4-40 \nabla 4$

[Depth 0.157]



◆ Truth Table

DB9 male

Failsafe Non TTL			
Actuator Terminals		RF Connector	
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	No Power,RF 1-0	
1	V	RF 2-0	
2	N/A	-	
3	GND	-	
4	Ind.1	Indicators	RF 1-0
5	Ind.2		RF 2-0
6	Ind.com		-
7	VDC		-
8~9	N/A	-	

Failsafe TTL		
Actuator Terminals		RF Connector
Solder Pins/D-SUB 9Pin Male		
Pin No.	Define	No Power,RF 1-0
1	VDC	RF 2-0
2	TTL	-
3	GND	-
4	Ind.1	Indicators
5	Ind.2	
6	Ind.com	
7~9	N/A	-

Latching Non TTL			
Actuator Terminals		RF Connector	
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	-	
1	V1	RF 1-0	
2	V2	RF 2-0	
3	GND	-	
4	Ind.1	Indicators	RF 1-0
5	Ind.2		RF 2-0
6	Ind.com		-
7	VDC		-
8~9	N/A	-	

Latching TTL			
Actuator Terminals		RF Connector	
Solder Pins/D-SUB 9Pin Male			
Pin No.	Define	-	
1	VDC		
2	TTL	RF 1-0	
3	GND	-	
4	TTL	RF 2-0	
5	Ind.1	Indicators	RF 1-0
6	Ind.2		RF 2-0
7	Ind.com		-
8~9	N/A	-	

◆ Product Selection

Series	Number Of Positions	Rf Connectors	Type	Frequency	Actuator Voltag	Terminated	Driver	Operating Temperature	Install	Control connector
E:Standard Series	2	N	L:Latching F:Failsafe	06:DC~6GHz 08:DC~8GHz 12:DC~12.4GHz	05:5V 12:12V 24:24V 28:28V	W No Terminated	0:Negative common 1:TTL Driver 2:Positive Common 3:Self Cutoff 4:Negative common And Indicators 5:TTL driver And Indicators 6:Positive Common And Indicators	0:Standard (-25°C~65°C) 1:Extended1 (-45°C~85°C) 2:Extended2 (-55°C~85°C)	S Normal	0:Solder Pins 1:D-Sub 9 Male (2 rows)