



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUG




Page No.

1 of 1

STK-5711- F26-RF400-ONI-Y

STRAIGHT PLUG

OUTLINE DRAWING

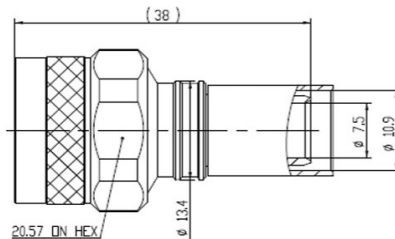

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC-6Ghz
VSWR	<1.25
Insert Loss	<0.05
Insulation	≥ 5000
Proof voltage	1500
Outer conductor	<0.4
Inner conductor	<0.8

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conductor	Beryllium copper	Au50
Outer conductor	Brass	Copper
Insulator	PTFE	
Gasket	Silicon rubber	
Nut	Brass	Copper

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+155°C
Weather standard	IP67

MECHANICAL INFORMATION

Whorl Pull	500N
Nut torque	5N.m
Tensile	400N
Torsion	2N

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in