

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
--	-----------------------------	---	---

Nomenclature: RIGHT ANGLE


Page No.

1 of 2

STK-5711- F26-RF400-RON-SB-Y

RIGHT ANGLE

OUTLINE DRAWING

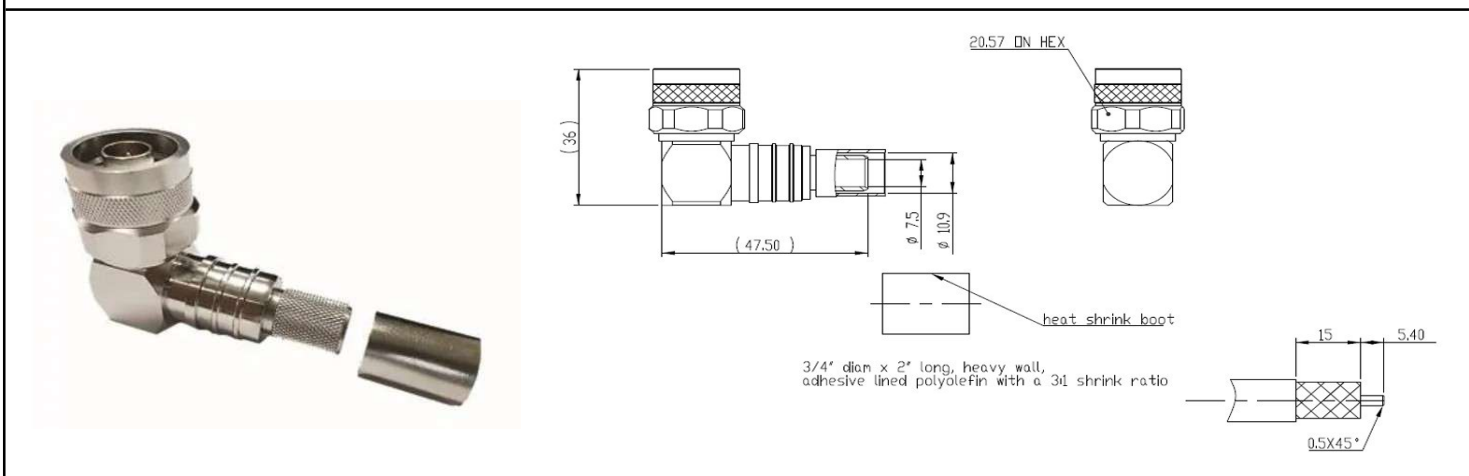

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 6 GHz
Dielectric Withstanding Voltage	1500 V
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Outer conduct	≤ 0.4
Inner Conduct	≤ 0.8
VSWR	≤ 1.35
Insertion Loss	$\leq 0.10(0-3\text{G})$

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner Conduct	Beryllium	Au ≥ 1.27
Outer conduct	Brass	Copper
Insulator	PTFE	
Nut	Brass	Copper

 Technical Data		STK SERIES CONNECTOR		 www.rfconnector.in			
Nomenclature: RIGHT ANGLE							Page No.
							1 of 2
ENVIRONMENTAL INFORMATION							
Temperature range				-55°C to +155°C			
Weather standard				IEC 60068 55/155/56			
MECHANICAL INFORMATION							
Whorl pull				500N			
Nut torque				5Nm			
Tensile force				400N			
Torsian				3N.m			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				 Defence & Aerospace Division			
				Email: sales.blr@rfconnector.in			
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in							