


STK-5711- F26RF400--RON-Y	STRAIGHT PLUG
---------------------------	---------------

OUTLINE DRAWING

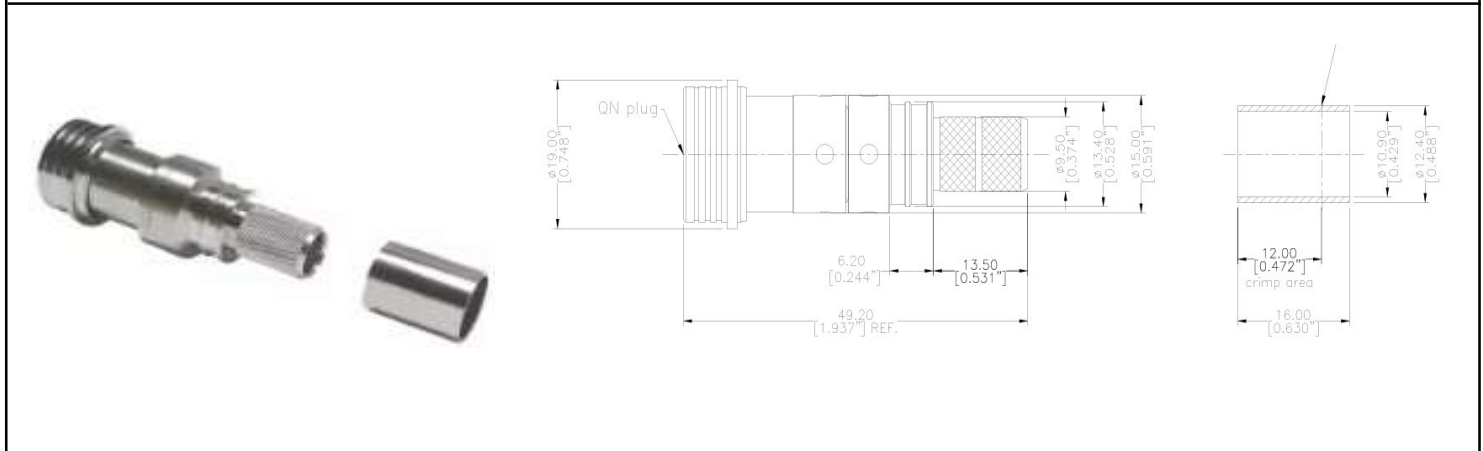

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range`	DC to 6 GHz
Dielectric Withstanding Voltage	2000 V rms
Insulation Resistance	≥10000 MΩ
VSWR	≤1.30
Insertion Loss	-0.1x f(GHz) dB

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Sn-Ni
Contact Pin	Beryllium Copper	Gold
Insulator	PTFE	
Shell	Brass	Sn-Ni
Ferrule	Copper	Sn-Ni
Gasket	Silicon Rubber	-

ENVIRONMENTAL INFORMATION

Temperature range	-40°C to +125°C
Weather standard	IEC 60068 40/125/21

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in						
Nomenclature: STRAIGHT PLUG			Page No. 2 of 2					
MECHANICAL INFORMATION								
Center Contact		Spring Finger						
Coupling Nut Torque		N/A						
Cbl-Connector Retention Force		120 lbs						
Durability		100 cycles						
Outer Contact		Crimp						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in								