



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUG


Page No.

1 of 1

STK-5711- F26RF400--VN

STRAIGHT PLUG

OUTLINE DRAWING

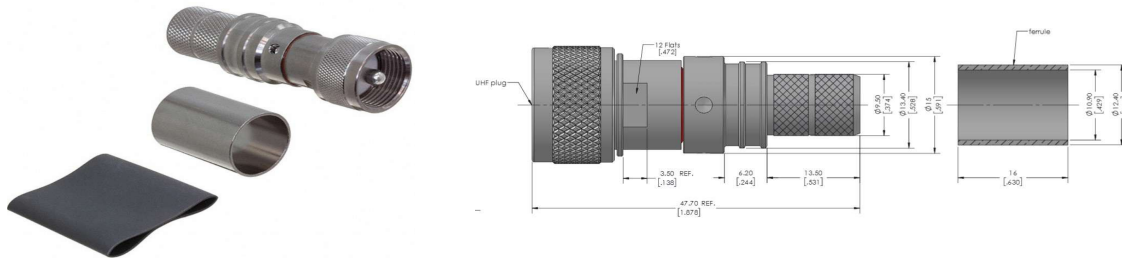

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC-3 GHz
Dielectric Withstanding Voltage	2000
Insulation Resistance	≥ 1000
VSWR	≤ 1.30 (DC-2.45 GHz)
Insertion Loss	-0.1xsqrt (f)

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body Shell	Brass	Sn-Ni
Contact Pin	Phosphor Bronze	Silver
Insulator	PTFE	-
Coupling Nut	Brass	Sn-Ni
Ferrule	Copper	Sn-Ni

ENVIRONMENTAL INFORMATION

Temperature range	-40°C~+125°C
Climatic class	IEC 60068 55/155/21

MECHANICAL INFORMATION

Center Conductor	Spring captive
Outer Conductor	Crimp
Coupling Nut Torque	N/A
Cable-Connector Retention Force	120
Durability	500

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in