



STK SERIES CONNECTOR



Nomenclature: STRAIGHT PLUG


Page No.

1 of 1

STK-5711- UD-RF400-827ND-SB

STRAIGHT PLUG

OUTLINE DRAWING

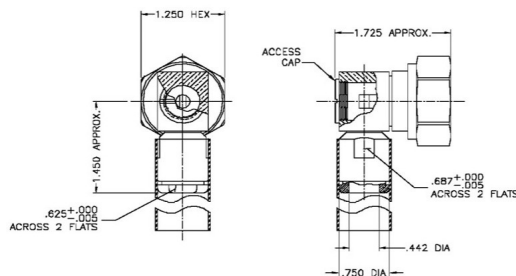

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 6 Ghz
Working Voltage	2700 vrms
VSWR	3 Ghz
Inserting Loss	$0.15 \times \sqrt{F_{ghz}}$

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Inner conductor	Brass	Silver
Outer conductor	Brass	Alballoy
Body	Brass	Alballoy
Other	Brass	Alballoy
Gasket	Silicone Rubber	
Dielectric	Teflon PTFE	
Shrink sleeve	Adhesive	

ENVIRONMENTAL INFORMATION

Temperature range		-40°C~+85°C	
Waterproofing standard		IP67	
Originated	Date	Approved	Date
Sang	01.11.25	Krishnamurthy	-
Synergy Telecom P Ltd,		-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India		-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in