



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: RIGHT ANGLE


Page No.

1 of 1

STK-5711- UD-RF400-ION-SB

RIGHT ANGLE

OUTLINE DRAWING

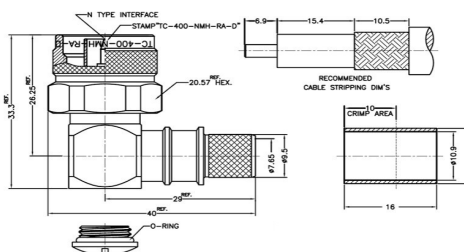

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	1000V
Frequency range	0-11Ghz
Dielectric voltage	1500V
Center contact	$\leq 1\text{m}$
Outer contact	≤ 0.25
Insulation resistance	$\geq 5000\text{M}$
RF leakage	-90db to 3Ghz
VSWR	≤ 1.25 DC -2.5Ghz

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body Shell	Brass	Albaloy
Contact Pin	Brass	Gold
Insulator	Teflon	Red
Ferrule	Copper	Albaloy
Gasket	Silicon	Red

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+155°C
Climatic class	IEC 60068 65/165/21

MECHANICAL INFORMATION

Force to engage and disengage	6 lbs Max
Center contact retention force	6 lbs Min
Coupling torque	30 in-lbs Min
Coupling nut retention force	100 lbs Min
Durability	≥ 500 cycles

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in