



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: RIGHT ANGLE


Page No.

1 of 1

STK-5711- UD-RF400-ONI-SB-TT

RIGHT ANGLE

OUTLINE DRAWING

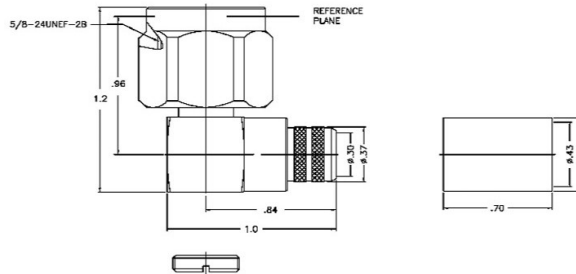

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Working voltage	1000 vrms
VSWR	1 to 2.5 Ghz
Insertion loss	0.15 x $\sqrt{\text{Fghz}}$

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Central contact	Brass	Gold
Outer contact	Bronze	Gold
Body	Stainless steel	-
Coupling nut	Stainless steel	-
Crimp sleeve	Brass	Alballoy
Dielectric	PTFE	-

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+155°C
Weather standard	IEC 60068 55/155/56

MECHANICAL INFORMATION

Whorl pull	500N
Nut torque	5Nm
Tensile force	400N
Torsion	3Nm

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in