


Nomenclature: STRAIGHT PLUG	Page No. 1 of 2
---	----------------------------

STK-5711- UD-RF400-RON-Y	STRAIGHT PLUG
--	-----------------------------

OUTLINE DRAWING

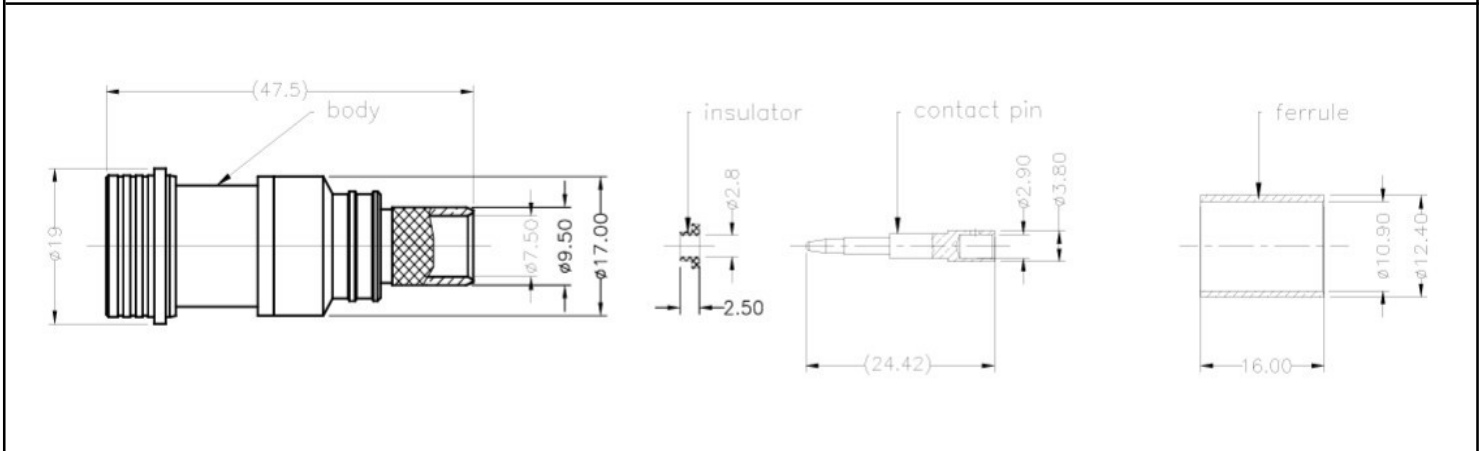

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency Range	DC to 6 GHz	
Dielectric Withstanding Voltage	1500 V	
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	
VSWR	≤ 1.20 to 1.35	
Insertion Loss	$-0.1 \times f(\text{GHz}) \text{ dB}$	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Brass	Albaloy
Center cont.	Brass	Gold
Insulator	PTFE	-
Gasket	Silicon	-
Ferrule	Copper	Albaloy

ENVIRONMENTAL INFORMATION

Temperature range	-55°C to $+85^{\circ}\text{C}$	
Weather standard	IEC 60068 55/155/56	

 Technical Data		STK SERIES CONNECTOR		 www.rfconnector.in			
Nomenclature: STRAIGHT PLUG							Page No.
							1 of 2
MECHANICAL INFORMATION							
Center Cont.				Capative			
Outer Cont.				Crimp			
Coupling Nut Torquw				N/A			
Durability				500 cycles			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
							Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in							