



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT JACK



Page No.

1 of 2

STK-5711-F26-240-OG-Y

STRAIGHT JACK

OUTLINE DRAWING

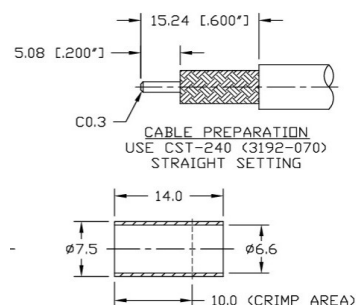

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	750 V (rms)
Frequency range	0-6 GHz
Dielectric With standing voltage	1000v
Center Contact	≤ 1.5 MQ
Outer Contact	≤ 1 MQ
VSWR	1.3 Max (0-6GHz)

ENVIRONMENT CHARACTERISTICS

Temperature range	-55°C - +155°C
Termal Shock	MIL-STD-202
Vibration	MIL-STD-202
Shock	MIL-STD-202

MECHANICAL INFORMATION

Force to engage and disengage	6 lbs MAX
Centercontact rention force	6 lbs Min
Coupling torque	N/A
Durability	≥ 500 cycles

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
Nomenclature: STRAIGHT JACK			Page No. 2 of 2
MATERIAL INFORMATION			
COMPONENTS	MATERIALS	PLATINGS (mm)	
BODY	BRASS	ALBALOY	
CONTACT PIN	PHOSPHOR BRONZE	GOLD	
INSULATOR	TEFLON	NATURAL	
FERRULE	BRASS	ALBALOY	
Originated	Date	Approved	Date
Sang	01.11.25	Krishnamurthy	-
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India		Rev	Amend
		Name	Date
		0	-
		-	-
		-	-
		 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in	

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in