



STK SERIES CONNECTOR



Nomenclature: RIGHT ANGLE


Page No.

1 of 2

STK-5711-F26-240-RN-SB-Y

RIGHT ANGLE

OUTLINE DRAWING

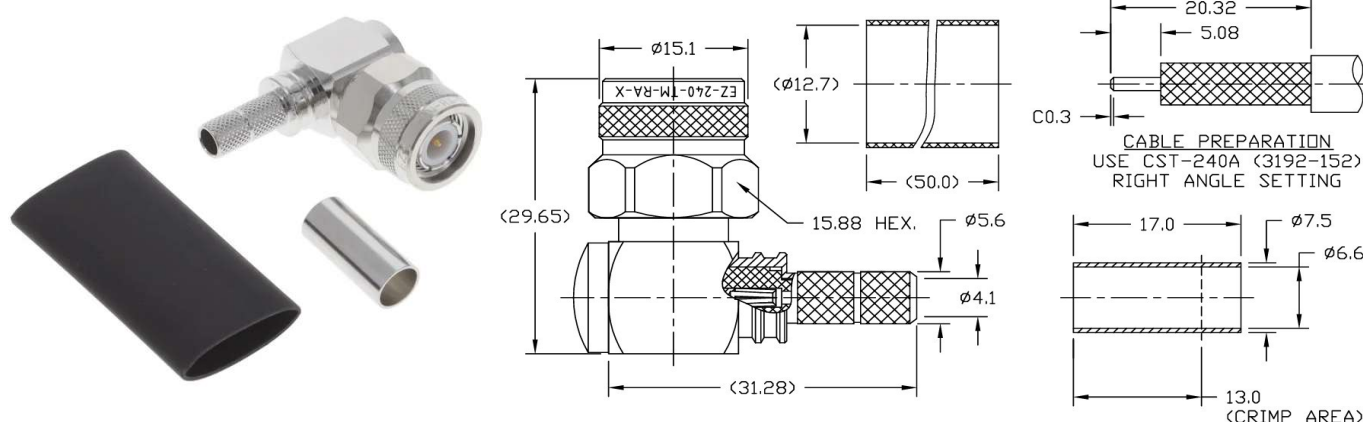

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Voltage rating	500V
Frequency range	0-6Ghz
Dielectric voltage	750V
Center contact	$\leq 3m\Omega$
Outer contact	$\leq 2m\Omega$
Insulation resistance	$\geq 5000M\Omega$
RF Leakage	N/A
VSWR	1.25Max@0-6Ghz

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
CONTACT PIN	BRASS	GOLD
INSULATOR	TEFLON	NATURAL
FERRULE	BRASS	ALBALOY

ENVIRONMENTAL INFORMATION

Temperature range	-55°C~+155°C	
Thermal Shock	MIL-STD 202G	

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
--	-----------------------------	---	---

Nomenclature: STRAIGHT PLUG	Page No.
	2 of 2

MECHANICAL INFORMATION

Force to enage and disengage				N/A				
Center contact retention force				6 lbs MIN				
Coupling torque				15 lbs MIN				
Coupling nut rentention force				60 lbs				
Durability				≥500 cycles				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in