



STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: REVERSE POLARITY


Page No.

1 of 1

STK-5711-F26-240-UN-SQ-Y

REVERSE POLARITY

OUTLINE DRAWING

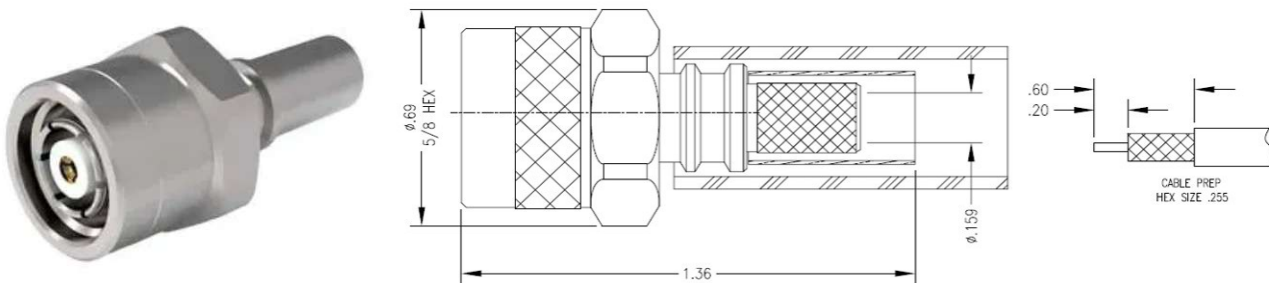

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency range	DC to 6 GHz	
VRMS	750 @ 60Hz	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
DIELECTRIC	PTFE	-
CONTACT	BERYLLIUM COPPER	-
CRIMP FERRULE	SOFT COPPER	-
GASKET	SILICONE RUBBER	-
HEAT SHRINK	POLYOLEFIN THICK	-

ENVIRONMENTAL INFORMATION

Temperature range		-40*c-125*C					
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in