



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: BULKHEAD JACK


Page No.

1 of 1

STK-5711-UD-240-OG-CI-Y

BULKHEAD JACK

OUTLINE DRAWING

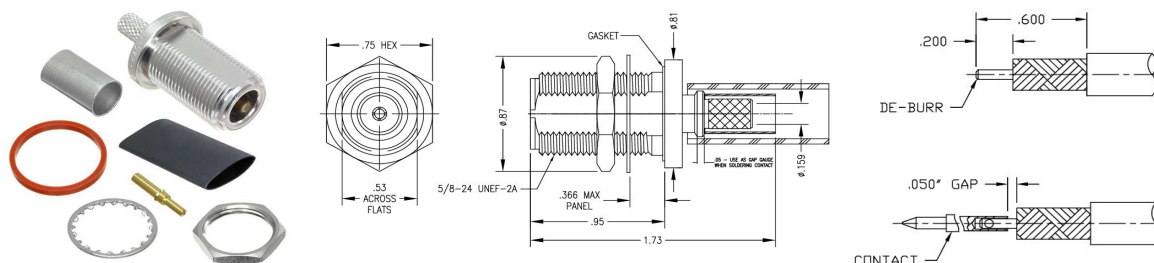

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC to 6 GHz
Working Voltage	500
Insulation Resistance	≥ 5000
VRMS	60Hz (sea level)
Temperature Range	-65°C to + 165°C

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
DIELECTRIC	PTFE	-
CONTACTS	BRASS	BERYLLIUM COPPER
OTHER PART	BRASS	-
GASKET	SILICON RUBBER	-
HEAT SHRINK	PLYOLEFIN	-

MECHANICAL INFORMATION

INTERFACE MIL-STD-348

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division
Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in