



STK SERIES CONNECTOR



Nomenclature: **STRAIGHT PLUG**


Page No.

1 of 1

STK-5711-UD-240-UN-Y

STRAIGHT PLUG

OUTLINE DRAWING

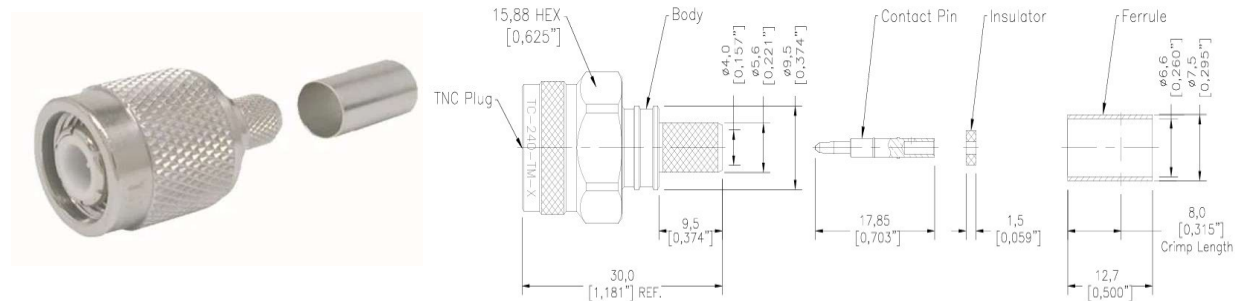

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	DC to 8 Ghz
Dielectric Withstanding Voltage	1500
Insulation Resistance	≥ 5000
VSWR	≤ 1.30

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	ALBALOY
Center Cont	BRASS	Gold
Ferrule	BRASS	ALBALOY
NUT	BRASS	ALBALOY
INSULATOR	PTFE	
GASKET	SILICONE	

ENVIRONMENTAL INFORMATION

Temperature range				-40*c-125*C			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				Email: sales.blr@rfconnector.in			



This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in