



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:CONN RF PLUG


Page No.

1 of 1

STK-571123931287

CONN RF PLUG

OUTLINE DRAWING

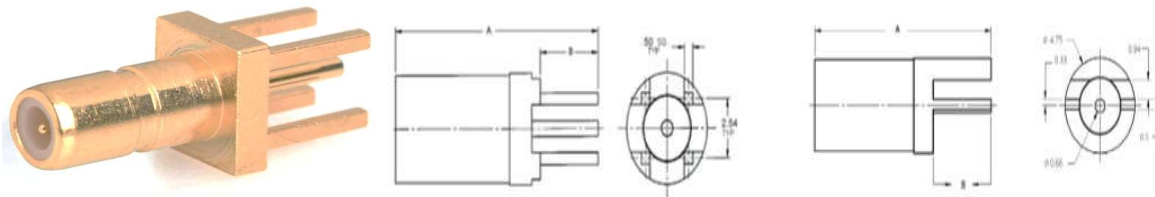

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	DC - 18 GHz
VSWR	1.07+ 0.01 F (GHz)
Insertion Loss	0.04 $\sqrt{F}$ (GHz)
RF Leakage	-90 + F (GHz)
Voltage in VRMS	

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	Stainless Steel / Brass	Gold or Passivated / BBR
Centre contact	Brass/Beryllium	Gold over Nickel
Gaskets	Silicone Rubber	-
Insulator	PTFE	-

ENVIRONMENTAL INFORMATION

Temperature range	- 55 $^{\circ}\text{C}$ / +155 $^{\circ}\text{C}$
Thermal Cycling	MIL-STD-202, Method 102
Vibration	MIL-STD-202, Method 102
Shock	MIL-STD-202, Method 102

MECHANICAL INFORMATION

Force to Engage / Disengage	Torque 12 N.com
Torque	60 to 80 N.com
Center Contact	22N
Cable Retention Force	> 136 N (30lbf)

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in