



STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: N PLUG 50 OHMS


Page No.

1 of 1

STK-571124071258

N PLUG 50 OHMS

OUTLINE DRAWING

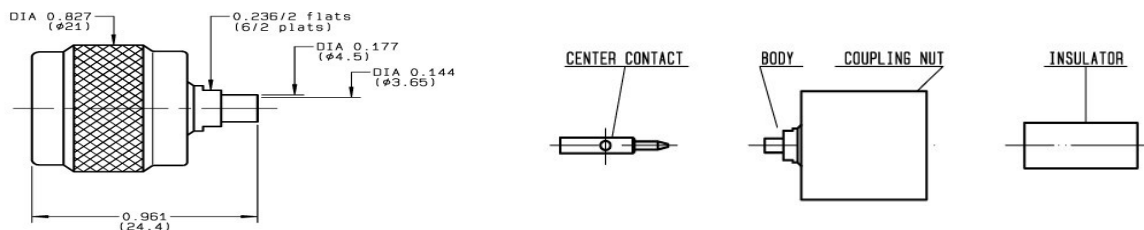

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 Ghz
Temperature rating	-55/+105°C
VSWR	1.15+ xF(Ghz) Maxi
RF INSERTION LOSS	0.048 F(Ghz) db Maxi
VOLTAGE RATING	335 vaff Maxi
DIELECTRIC WITH STANDING VOLTAGE	1000 M Ω Mini
INSULATION RESISTANCE	500 M Ω Mini

MECHANICAL INFORMATION

DURABILITY	500 CYCLES
WEIGHT	24.86 gr
Mating	130 cm.N
Cable retention	500 N Mini

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	GOLD 0.2 OVER BICKLE 2
OUTER CONTACT		
CENTER CONTACT	BRASS	GOLD 0.5 OVER BICKLE 2
INSULATOR	PTFE	
OTHER PIECES	BRASS	BBR 2
GASKET	SILICON RUBBER	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in



This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in