


Technical Data	STK SERIES CONNECTOR	
-----------------------	-----------------------------	---

Nomenclature: 2-Hole Flange Mount Jack Receptacle - Extended Dielectric	Page No. 1 of 1
--	--------------------

STK-571125581257	2-Hole Flange Mount Jack Receptacle - Extended Dielectric
-------------------------	---

OUTLINE DRAWING

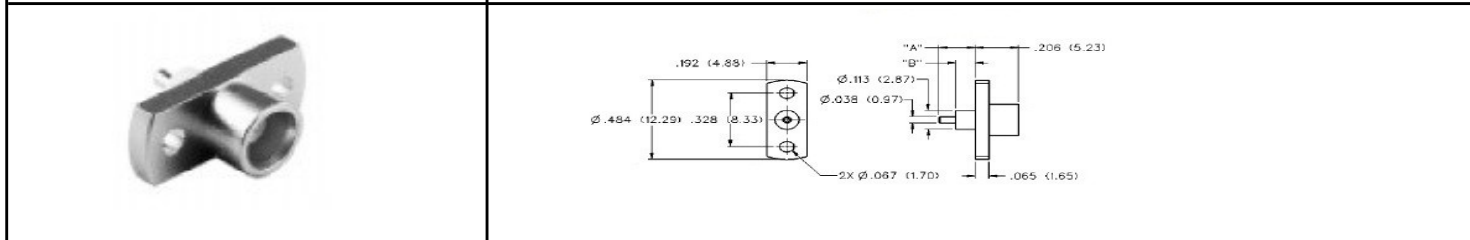

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Frequency range	DC-6 GHZ
Temperature Rating	Minus -55 to +155 deg C
V.S.W.R	1.05 + 0.050 x F(GHz) Maxi
Dielectric Withstanding Voltage	≥1000 VEF MINI
Insulation Resistance	≥1000MΩ
Voltage Rating	335 VEF MAX
Insertion loss	0.03 √F(GHz) dB Maxi

MATERIAL INFORMATION

Parts	Material	Surface Plating
Connector Body	Brass	GOLD 0.2 OVER NICKEL 2
Insulator	PTFE(Teflon)	
Center conductor	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
Gasket	N/A	
RoHS	Compliance	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in