


Technical Data	STK SERIES CONNECTOR	
----------------	----------------------	---

Nomenclature: SQUARE FLANGE JACK RECEPTACLE WITH EMI GASKET FOR 0.3MM DIA	Page No. 1 of 1
---	--------------------

STK-571127861436	SQUARE FLANGE JACK RECEPTACLE WITH EMI GASKET FOR 0.3MM DIA
------------------	---

OUTLINE DRAWING

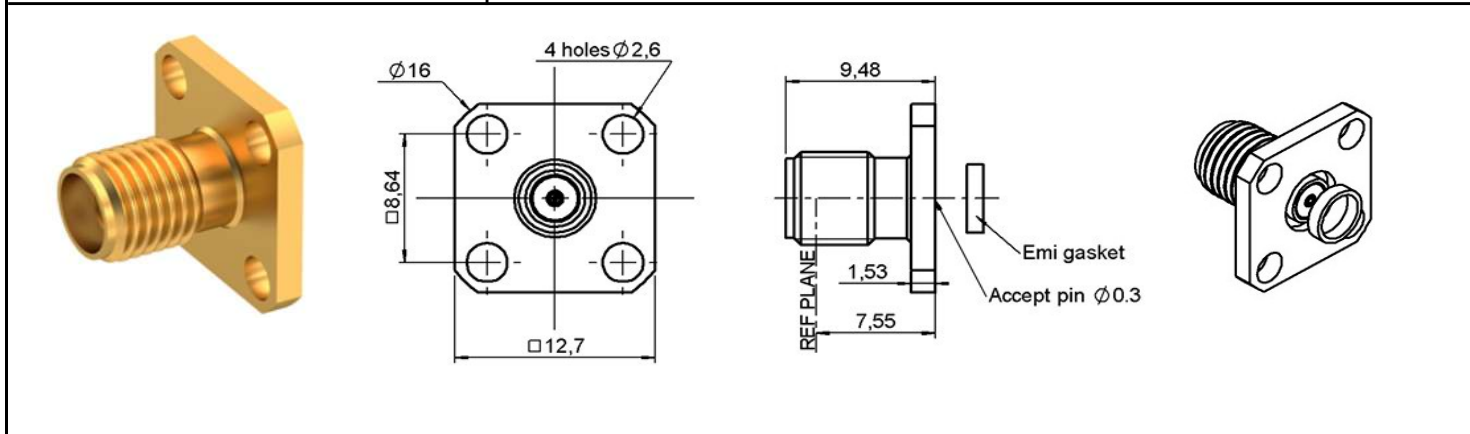

TECHNICAL DATA

ELECTRICAL DATA

VSWR	1.04 + 0.006 x F(GHz) Maxi
Impedance	50 Ω
Insertion loss	0.07 √F(GHz) dB Maxi
Frequency	0-18 GHz
RF leakage	(-) (70 - F(GHz)) dB Maxi
Insulation resistance	5000 MΩ mini
Dielectric withstanding voltage	1000 Veff mini
Voltage rating	335 Veff Maxi

MECHANICAL INFORMATION		MATERIAL INFORMATION		
Axial force– Mating end	27 Nmini	COMPONENTS	MATERIALS	PLATINGS (µm)
Axial force– Opposite end	27 Nmin	BODY	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2
Torque	NA N.cmmini	CENTER CONTACT	BERYLLIUMCOPPER	GOLD 1.3 OVER NICKEL 2
Mating life	500 Cycles mini	OUTER CONTACT		
Weight	2.500 g	INSULATOR	PTFE	
		GASKET	SILICONE RUBBER	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in