



STK SERIES CONNECTOR



Nomenclature: CONN RF50 SMA SCREW ON FE CONT HER W/CY


Page No.

1 of 1

STK-571128571282

CONN RF50 SMA SCREW ON FE CONT HER W/CY

OUTLINE DRAWING

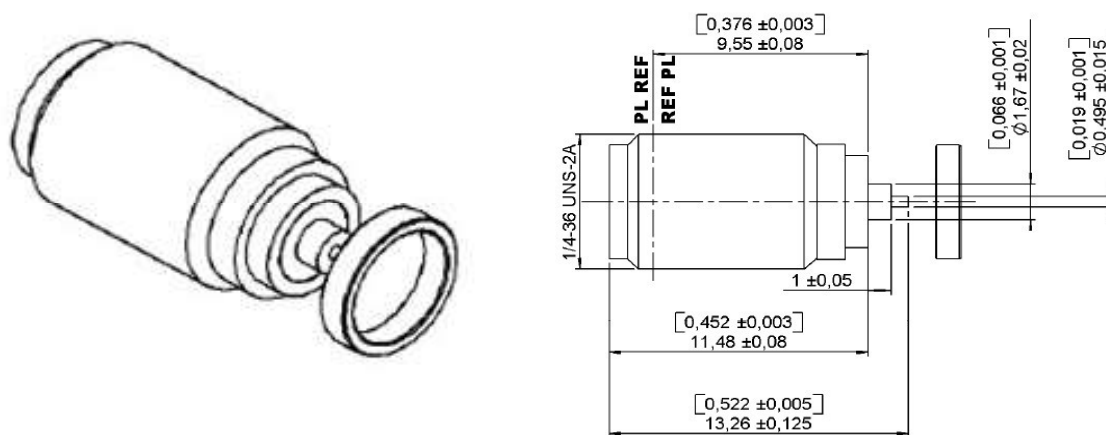

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-26.5 GHz
VSWR	1.10 + 0,0100 x F(GHz) Maxi
Insertion loss	0.12 Δ F(GHz) dB Maxi
RF leakage	- (100 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric with standing voltage	1000 Veff mini
Insulation resistance	5000 MW mini

MATERIAL INFORMATION

Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	2.8 N.cm mini
Mating	NA N.cm
Panel nut	280 N.cm
Mating life	500 Cycles mini
Weight	1,7400 g

ENVIRONMENTAL

