


Technical Data	STK SERIES CONNECTOR	
-----------------------	-----------------------------	---

Nomenclature: CONN RF50 SMA SQ FLNG PL CY CONT	Page No. 1 of 1
---	---------------------------

STK-571132981290	CONN RF50 SMA SQ FLNG PL CY CONT
-------------------------	----------------------------------

OUTLINE DRAWING

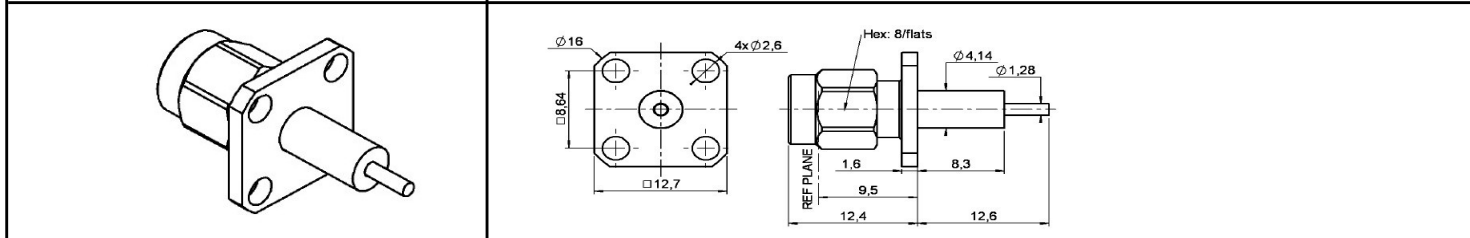

TECHNICAL DATA

ELECTRICAL DATA

Frequency (MHz)	0-18 GHz
VSWR	1.06 + 0.002 x F(GHz) Maxi
Impedance	50 Ω
Insertion loss	0.07* √F(GHz) dB Maxi
RF leakage	(-) (100 - F(GHz)) dB Maxi
Dielectric withstanding voltage	1000 Veff mini
Voltage rating	500 Veff Maxi
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2
PTFE		
GASKET	SILICONE RUBBER	
OTHERS PARTS	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2

ENVIRONMENTAL

Operating temperature	(-65/+165 ° C)
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	 Email: sales.blr@rfconnector.in
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P