Technical Data

STK SERIES CONNECTOR

www.rfconnector.in

Nomenclature:CONN RF50 N PL M CAB7/8" HELIAX

STK-571151981262	CONN RF50 N PL M CAB7/8" HELIAX

OUTLINE DRAWING

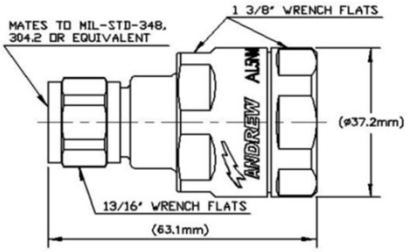

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 ohm
Frequency	0 – 5200 MHz
Test Voltage	2000 V
VSWR	1.13
Outer Contact	0.30 mOhm
Inner Contact	2.00 mOhm
Insertion Loss	0.05 dB

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY		
INNER CONTACT	CAPTIVATED	SILVER
OUTER CONTACT	RING FLARE	TRIMETAL

ENVIRONMENTAL INFORMATION

Temperature range	-67 °F to +185 °F
Vibration Test Method	IEC 60068-2-6

MECHANICAL INFORMATION

Durability	25 cycles
Torque	4.52 N-m - 40.00 in lb
Mating life	500 Cycles mini
Weight	133.89 g

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in